


IR Converter for Bose® Lifestyle® and MRI Systems

This one-of-a kind converter allows a compatible learning IR remote to communicate with Bose Lifestyle systems

The Model C-1024A makes it possible for multiple BOSE sound and video components to respond to the commands issued by a single Pronto® or Harmony 880 learning remote control. Small enough to be easily hidden, the C-1024 is designed for placement behind the video display in the home theater room. Only the small IR sensor remains visible near the front of the display where it receives the remote control commands. System control is achieved through a serial jack connection from the C-1024A to the rear panel of the LIFESTYLE® system. The C-1024 is compatible with the Bose music center models LIFESTYLE 20, 25 and 30 and the MRI LIFESTYLE 40 and 50.

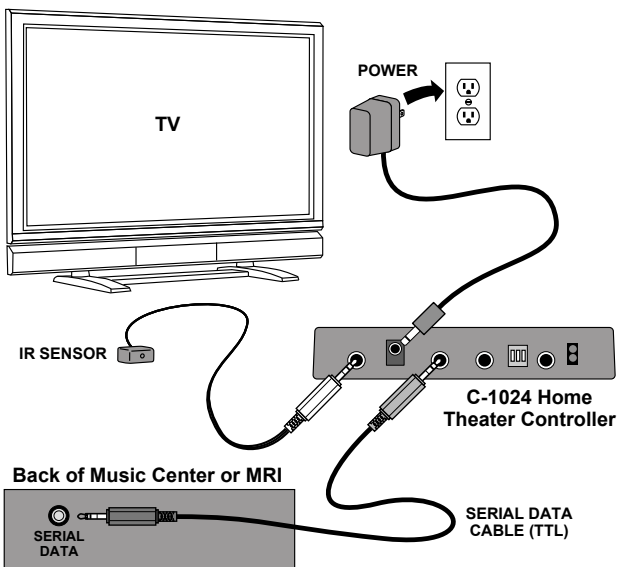

SPECIFICATIONS:

Model Number:	C-1024A	Size (H x W x D):	2.5 x 5 x 1.1
IR Input Connectors:	(2) 3.5mm	Warranty:	One Year Replacement
TTL Output Connector:	3.5mm	Power Requirements:	12 volts DC
RS-232 Output Connector:	3.5mm	Regulatory Approvals:	FCC
IR Input Pinout (shaft, ring, tip):	ground, data, +5V	Accessories Included:	IR receiver, power supply, 3.5mm cord, Manual
Data Pinout (shaft, ring, tip):	ground, data out, data in		

Bose and LifeStyle are trademarks of Bose Corporation.