

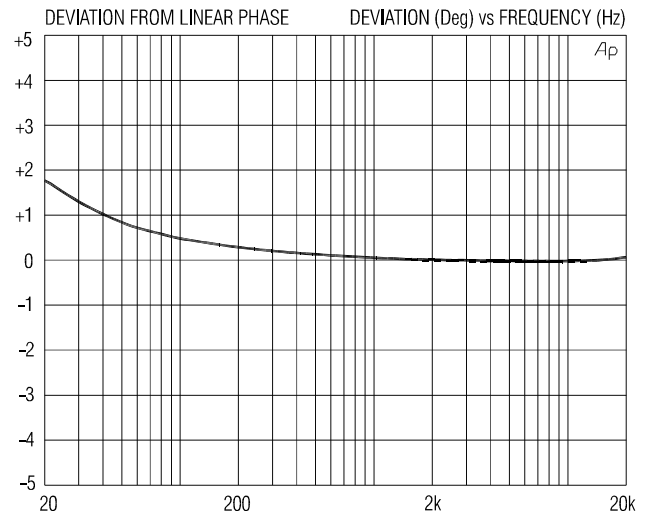
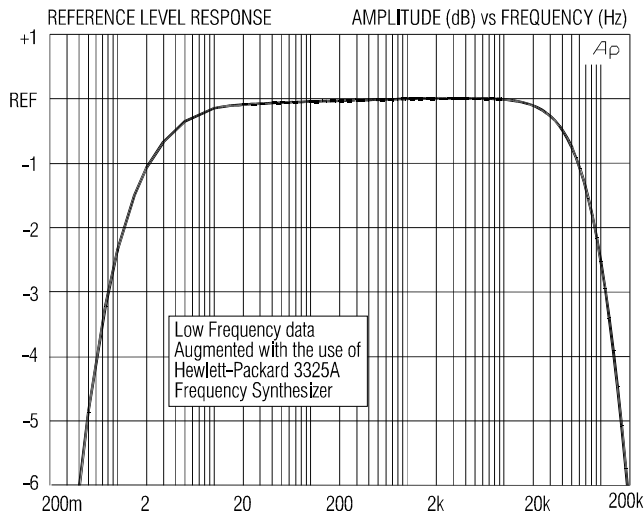
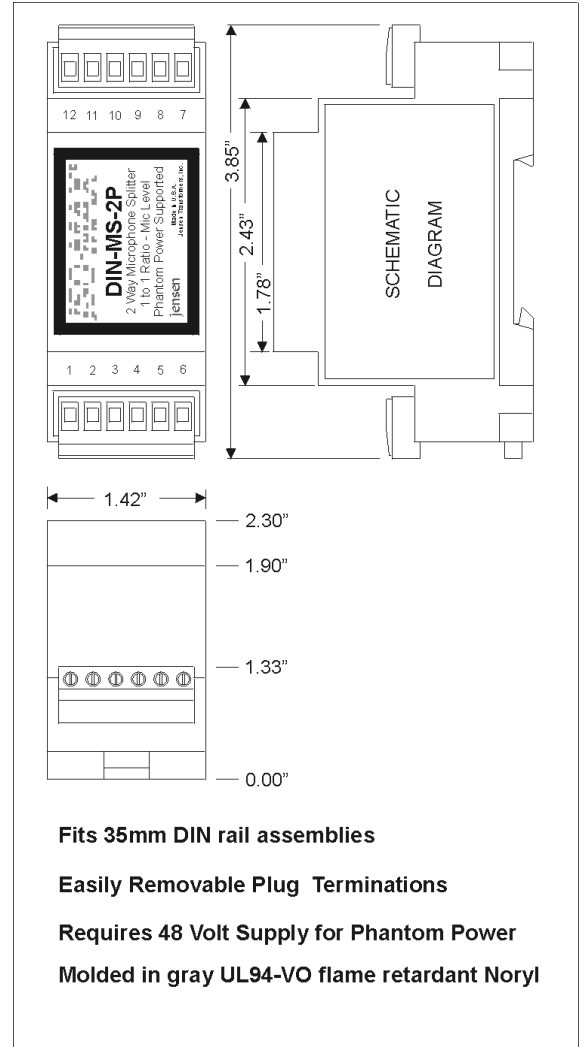
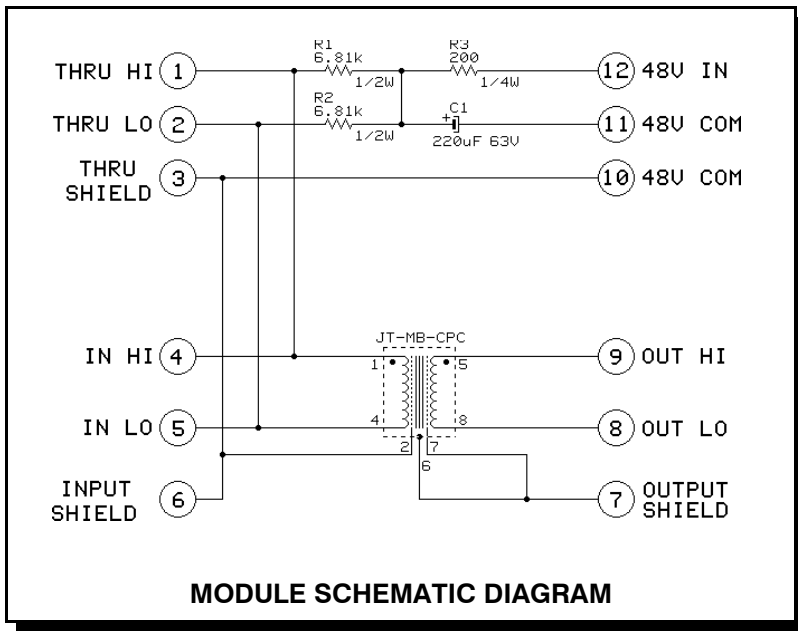


MICROPHONE SPLITTER MODULE DUAL FARADAY SHIELDS FOR HIGH ISOLATION

- Provides additional, isolated balanced output as mic "splitter"
- Solves "transformerless" preamp RFI and CMRR problems
- High common-mode rejection: 130 dB at 60 Hz
- Excellent frequency response and time domain performance
- Provides support circuitry for phantom powered microphones


This module is designed to be driven from a 150 Ω microphone source and loaded by the typical 1 kΩ input impedance of microphone preamplifiers. It can be used with balanced or unbalanced sources and/or loads since both primary and secondary are fully balanced. A 30 dB magnetic shield package is standard.

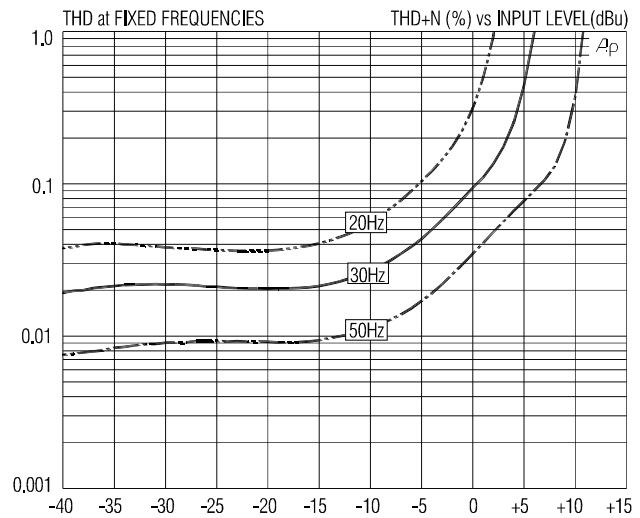

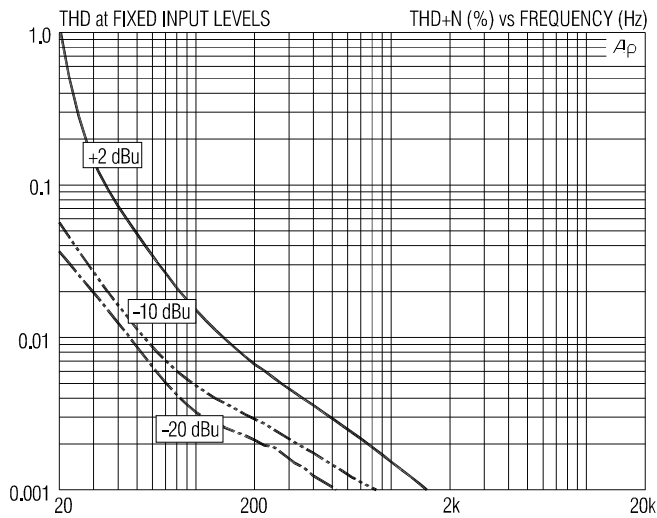


DIN - MS - 2P SPECIFICATIONS (all levels are input unless noted)

PARAMETER	CONDITIONS	MINIMUM	TYPICAL	MAXIMUM
Input impedance, Z_i	1 kHz, -20 dBu, test circuit 1	1.00 k Ω	1.08 k Ω	1.15 k Ω
Voltage gain	1 kHz, -20 dBu, test circuit 1	-0.90 dB	-0.82 dB	-0.70 dB
Magnitude response, ref 1 kHz	20 Hz, -20 dBu, test circuit 1	-0.25 dB	-0.09 dB	± 0.0 dB
	20 kHz, -20 dBu, test circuit 1	-0.25 dB	-0.10 dB	+0.1 dB
Deviation from linear phase (DLP)	20 Hz to 20 kHz, -20 dBu, test circuit 1		+1.7/-0 $^\circ$	$\pm 3.0^\circ$
Distortion (THD)	1 kHz, -20 dBu, test circuit 1		<0.001%	
	20 Hz, -20 dBu, test circuit 1		0.036%	0.15%
Maximum 20 Hz input level	1% THD, test circuit 1	0 dBu	+2.0 dBu	
Common-mode rejection ratio (CMRR) 150 Ω balanced source	60 Hz, test circuit 2		130 dB	
	3 kHz, test circuit 2	80 dB	95 dB	
Common-mode rejection ratio (CMRR) 150 Ω unbalanced source	60 Hz, test circuit 3		115 dB	
	3 kHz, test circuit 3		80 dB	
Output impedance, Z_o	1 kHz, test circuit 1		250 Ω	
DC resistances	primary (pin 4 to pin 5)		50 Ω	
	secondary (pin 8 to pin 9)		50 Ω	
Capacitances @ 1 kHz	primary to shield and case		75 pF	
	secondary to shield and case		87 pF	
Turns ratio		1:0.999	1:1.000	1:1.001
Temperature range	operation or storage	0 $^\circ$ C		70 $^\circ$ C
Breakdown voltage (see IMPORTANT NOTE below)	primary or secondary to shield and case, 60 Hz, 1 minute test duration	250 V RMS		

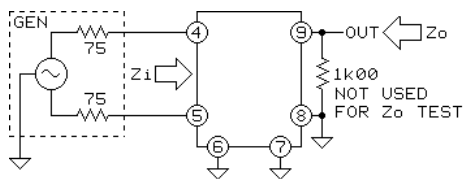

TEST CIRCUIT 1



TEST CIRCUIT 2

All minimum and maximum specifications are guaranteed. Unless noted otherwise, all specifications apply at 25 $^\circ$ C. Specifications subject to change without notice. All information herein is believed to be accurate and reliable, however no responsibility is assumed for its use nor for any infringements of patents which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Jensen Transformers, Inc.

IMPORTANT NOTE: This device is NOT intended for use in life support systems or any application where its failure could cause injury or death. The breakdown voltage specification is intended to insure integrity of internal insulation systems; continuous operation at these voltages is NOT recommended. Consult our applications engineering department if you have special requirements.

JENSEN TRANSFORMERS, INC., 7135 Hayvenhurst Avenue, Van Nuys, CA 91406-3807, USA
(818) 374-5857 • FAX (818) 374-5856 • www.jensen-transformers.com