

### UniDrive

#### Point to Point HDTV Cat 5 System

- Component video, digital audio, and analog audio
- Pristine HDTV signals up to 1,000 feet from source
- IR remote control signal pathway in Cat 5 bus

The UniDrive delivers HDTV signals from a single source to one remote location up to 1,000 feet away. Unlike passive balun systems, the UniDrive employs Active Gain Equalization (AGE), dramatically extending range and signal integrity. In addition to HDTV audio and video signals, the UniDrive has a 3-conductor pathway for infrared control signals. This pathway can be used for signals traveling in either direction.

The system includes one Model 9880T Cat 5 Transmitter, and one Model 9880 Cat 5 Receiver. The cable length compensation adjustment on the receiver allows the installer to fine tune image quality over long Cat 5 runs. Only the transmitter requires a power supply; the receiver is powered over the Cat 5 bus.




#### AVP-11 FEATURES:

- One A/V input, one A/V output
- Audio, video and IR signals carried over two Cat 5 cables
- High bandwidth component video (YPbPr) 1080p
- Digital audio (coaxial) and stereo analog audio
- Active Gain Equalization (AGE) technology
- Cable length compensation adjustment at remote location
- Power supply for transmitter also powers receiver
- Wallplate or enclosed receiver option



Compatible Cat 5 Receivers:  
Models 9878 (not shown), 9879 and 9880.

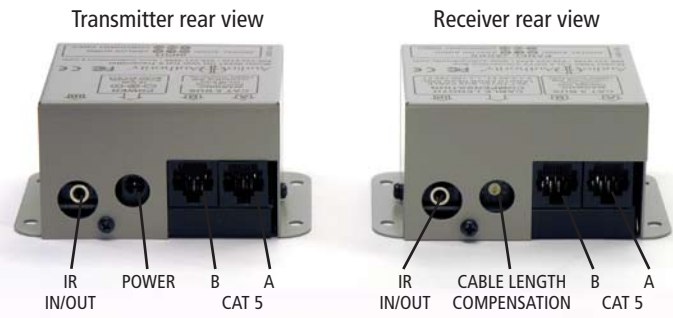

#### SPECIFICATIONS:

Model Number:	AVP-11 (9880/9880T)	Analog Audio Input/Output:	Right/Left Stereo	DC Input Connector:	5.5 X 2.1mm
Video Signal Type:	Component (YPbPr)	Digital Input/Output Type:	Coaxial	DC Input Voltage/Polarity:	18V/Center positive
Video Formats (Analog):	480i/p, 540i/p, 720p, 1080i/p	Input Impedance:	75 ohms/100K ohms	Max DC Input Current:	250mA
Input/Output Impedance:	75 ohms	Min Load Impedance:	75 ohms/10K ohms	Transmitter Size (H-W-D, inches):	1.75 x 3.75 x 3
Input Ground Isolation:	Yes	Multi-channel Digital:	Yes	Receiver Size (H-W-D, inches):	1.75 x 3.75 x 3
Gain:	1	Frequency Response:	10-50KHz	Warranty:	One Year Replacement
Gain Accuracy:	2%	S/N Ratio:	55dB	Agency Approvals:	FCC, CE
3dB Bandwidth:	120MHz	THD+Noise:	0.10%	Accessories Included:	571-014 Power Supply
Input Coupling:	AC	Crosstalk:	-70dB		
S/N Ratio:	65dB				
Max Gain/Equalization:	40dB equalization				