


DIGI-HD-COAX2-S



DIGI-HD-COAX2-R

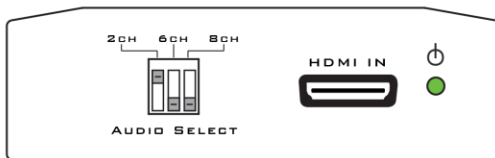

Video Amplifier Bandwidth	10.4 Gb/s
RG6 Max Distance (point-to-point or between links)	1080p: 300' (90m) 1080i: 650' (200m) 720p: 650' (200m)
RG59 Max Distance (point-to-point or between links)	1080p: 250' (80m) 1080i: 500' (150m) 720p: 500' (150m)
Max Links	7
Transmitter Connectors (DIGI-HD-COAX2-S)	One (1) HDMI type A connector and two (2) female BNC
Receiver Connectors (DIGI-HD-COAX2-R)	One (1) HDMI type A connector and two (2) female BNC
Supported Audio	PCM 2ch @ 48 kHz (2.0) PCM 6ch @ 48kHz (5.1) PCM 8ch @ 48kHz (7.1)
Output Colorspace	YCbCr 4:2:2
Supported Resolutions	720p60, 1080i30, 1080p60, 1080p24 (3D not supported)

Operating Temp Range	32 to 104 degrees F 0 to 40 degrees C
Operating Humid Range	10 to 85% non-condensing
Dimensions	1.14"H x 3.64" W x 3.84"L (4.73" incl. connectors) 29mm H x 92.5mm W x 97.5mm L (120mm incl. connectors)
Enclosure	Metal (Silver)
Power	5 VDC / 2A
Regulatory	CE, RoHS
Compliance	HDCP
Shipping Weight	1.45lbs. (660g)
Max HDMI Cable Length	6' (2m) or less
Intelix Part Numbers	Transmit: DIGI-HD-COAX2-S Receive: DIGI-HD-COAX2-R
Included Accessories	(1) power supply, (1) 75ohm terminator, (2) Mounting brackets
Warranty	2 years