



Digital Audio Switcher with AutoSelect™

- 4 digital audio inputs, 1 digital audio output
- Supports digital coaxial and optical connections
- Automatically selects the active audio input
- Cross-converts optical and coaxial signals
- Easily switch between CD, DVD, satellite, & cable


Manufactured exclusively for Cable Solutions, the Model 1177A-1 is Audio Authority's redesigned 4-in, 1-out AutoSelect™ digital audio switcher — the perfect solution when digital audio sources outnumber your system's digital audio inputs. The 1177A-1 switches both digital coaxial and optical audio including automatic cross-conversion between digital audio formats, outputting both simultaneously. Its innovative AutoSelect logic automatically chooses the active source, or the selection can be controlled manually.

%/+5!%: 95H F 9G

- Four audio inputs, one audio output
- Coaxial and optical digital audio
- Automatic digital audio cross-conversion
- AutoSelect™ technology
- Manual selection override
- All metal construction
- Made proudly in our own US factory



%/+5!%: fYUf dUby

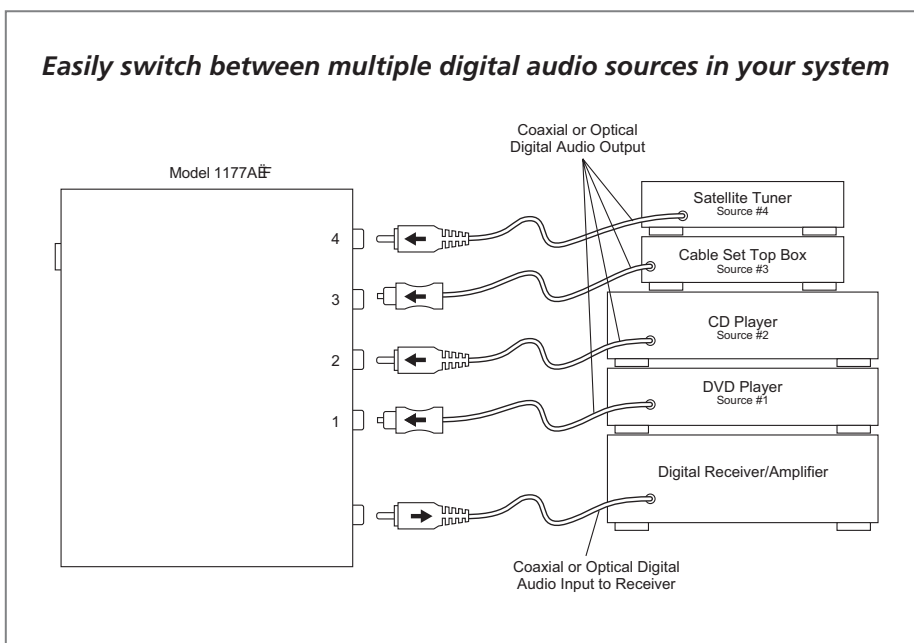

SPECIFICATIONS:

Analog/Digital	Digital	DC Input Voltage/Polarity	12V/either polarity
Digital Input/Output Type	Coaxial+optical in/o ut	Max DC Input Current	150mA
Input Impedance	75 ohms	Power Supply	571-013
Min Load Impedance	75 ohms	Size (H-W-D, inches)	2.25 x 5.6 x 4.7
Multi-channel	Yes	Enclosure:	Steel
DC Input Connector	5.5 x 2.1mm	Warranty:	One year replacement