

FURUTECH
PURE TRANSMISSION

Refined Power and Signal
from AC mains to
Speakers!

2016

WWW.FURUTECH.COM

Luxuriously made products, elegantly engineered, sensuous sounding and looking, a pleasure to use, plus the finest parts, technology and materials treatment available today imparts that elusive sense of true quality all audio and video enthusiasts crave.

Furutech's Pure Transmission Philosophy

Audio and video enthusiasts quickly find the limits of so-called "industrial" or "hospital" grade AC power connections. At Furutech, we achieve precise signal transfer characteristics with meticulous, high-level engineering of the total product, focusing our energy on making the best, most luxurious, best sounding components using cutting-edge materials and processes, like our Two-Stage Cryogenic and Demagnetizing Super α Alpha Treatment. And we do it all at very competitive prices.

Everything you see, hear, and experience from a home entertainment system depends entirely on the quality of the AC mains supply and the power supplies of each component. If you start with compromised power, you will never reach and experience those intimate moments of profound, nuanced, detailed and dynamic musical presentation, or thrill to involving multichannel sound and video that reaches out to you both emotionally and dynamically.

You will enjoy a greater sense of power, dynamics, and resolution, with cleaner, blacker backgrounds and a larger, more stable soundstage, with vivid tonal colors and deeper extension at both ends of the frequency range. Video displays of all types exhibit greater, sharper resolution with less ghosting, color shift, "snow", or vertical and horizontal lines.

NanoFlux-NCF Power Cord

Refinement Has a New Name...
Furutech's Top-of-the-Line Flux Cable series



Top of the Line


NanoFlux-NCF Power Cord

Fitted with CES Innovations Award Winning
FI-50 NCF Piezo Ceramic Connectors

La Grande Épreuve

Grand Prix racing's single focus: Testing the absolute limits of technology and performance.

Furutech builds each and every cable in their line the same way. Optimized engineering solutions applied to advanced materials and processes with utterly meticulous build quality for the ultimate test.

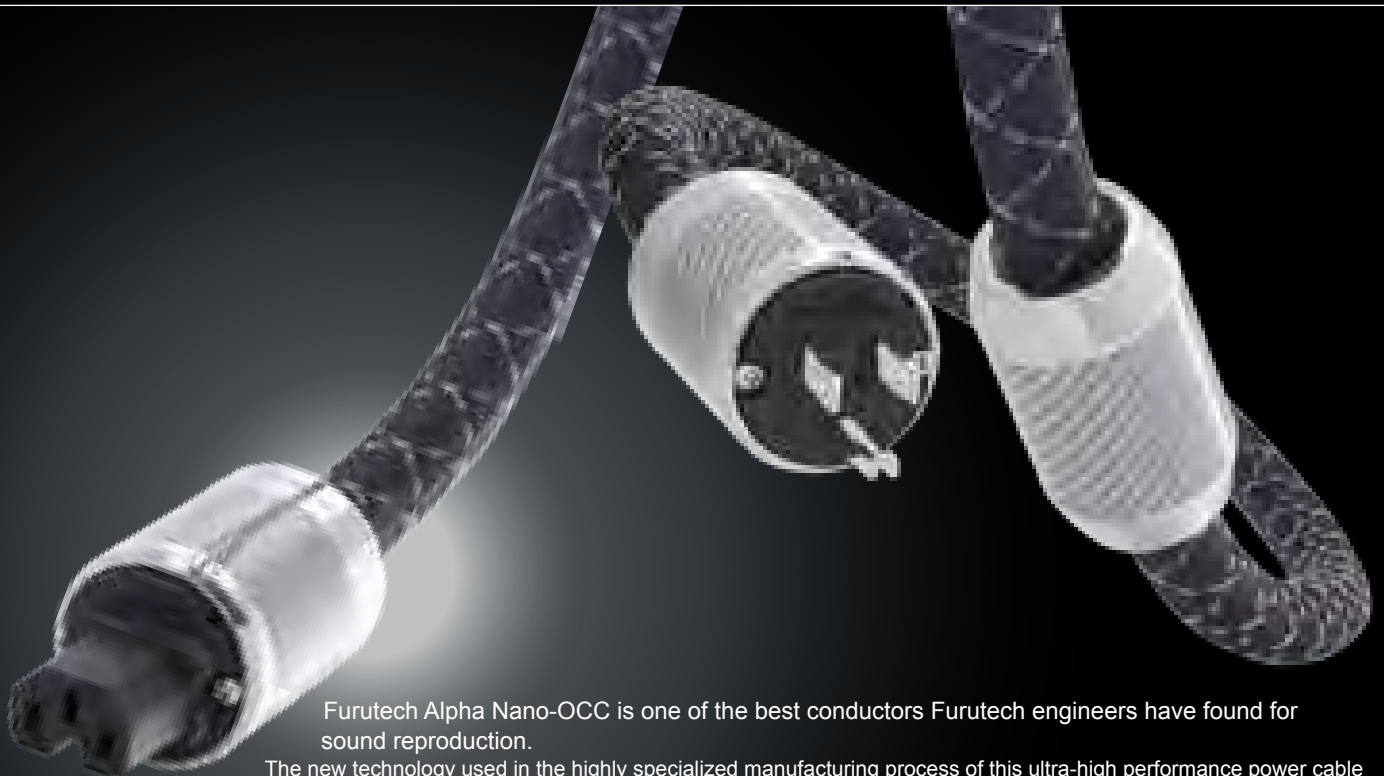

Furutech Alpha Nano-OCC is one of the best conductors Furutech engineers have found for sound reproduction.

The new technology used in the highly specialized manufacturing process of this ultra-high performance power cable combines Furutech's world renowned Alpha-OCC conductors with Furutech's extremely effective signal transmission enhancer, Nano Liquid. Nano Liquid's molecules are so tiny (8 nano-meters in diameter (8/1000000mm)) they cover the Alpha-OCC surface and "fill up" any concave-convex sections left on the conductor surface during the production process, increasing the electric conduction area and debasing impedance. The very precise mix of gold and silver super-micro particles and amount of dispersing Squalene oil used on the conductor has great influence on the sound reproduction, and Furutech's engineers settled on their exact ratio of gold to silver particles after careful audition of countless test samples. The resulting "tuned" cable offers superb overall balance of qualities that Furutech is known for that allows you to feel experience and communicate with music. The results are extremely fine resolution down and through the very low noise floor, improved sound staging and image palpability, a musical, attractive, "round" midrange, tight and controlled bass, plus power and dynamics to spare to set your music on fire!

Furutech's beautifully-finished FI-50 NCF(R) IEC and FI-50M NCF(R) NCF series connector housings are layered silver-plated carbon fiber in a damping and insulating acetal copolymer surrounded by nonmagnetic stainless steel. The European version features FI-E50 NCF(R) Schuko

- The body of the connectors incorporates an "active" damping material: Nano Crystal² Formula - Nano Crystalline, Ceramic and Carbon Powder. Incorporated into select Furutech products, Nano Crystal² Formula --- NCF is comprised of a special crystalline material that has two "active" properties. First, it generates negative ions that eliminate static and secondly, it converts thermal energy into far-infrared. Furutech then combines this remarkable crystalline

material with nano-sized ceramic particles and carbon powder for their additional "Piezo Effect" damping properties. The resulting Nano Crystal² Formula is the ultimate electrical and mechanical damping material.

- NCF series connectors feature α (Alpha) Pure Copper conductors equipped with Furutech's advanced Flux Damper Earth/Ground Jumper System (US Patent No.: 6,669,491)
- Furutech's revolutionary Neo-Damper material incorporated into NCF connector housings
- Nanoflux conductors are 3 x 3.8mm cores of α (Alpha) Nano -OCC Conductors
- Cable features a full α (Alpha) conductor shield to protect against radiated noise

NanoFlux Series Cables

Refinement Has a New Name... Top End Performance Speaker Cable

NanoFlux Speaker Cable

High Performance Speaker Cable

Cable Specifications:

- α (Alpha) Nano-Au-Ag OCC Pure Transmission Conductors
- Filter: cotton
- Dielectric/insulation: Audio grade PE with resonance damping carbon powder
- Nonmagnetic rhodium-plated banana connectors CF-202R and spade connectors CF-201R

The Effective Diameter of Your Music!

The link between speakers and amplifiers is one of the most critical in a system. Speaker cables carry high current and require low resistive loss to avoid turning part of the signal energy into heat; high performance construction techniques call for large cable diameters or bundles of smaller conductors for an effective large diameter. Low resistance also keeps an amplifier's damping factor high avoiding uncontrolled driver movements.

FURUTECH specifies α (Alpha) Nano-Au-Ag OCC Pure Transmission conductors terminated with high performance rhodium-plated nonmagnetic pure copper spade connectors for the amplifier end and rhodium-plated banana connectors at the other end. The smooth, natural, utterly musical presentation is down to meticulous engineering and careful audition of various suitable materials. These results in the superb overall balance of qualities that Furutech has long been known for that allows you to feel, experience and communicate with music.



Furutech's High End Performance Flux Line series



Jumperflux-S (spade)

Flux Cable Series -- Furutech α (Alpha) OCC Pure Transmission conductors terminated with beautifully-engineered high-performance rhodium-plated connectors. The substantially-built extremely nonresonant connector bodies are finished in layered carbon fiber and nonmagnetic stainless steel providing improved mechanical damping for greater resolution, clarity, and powerful dynamics.

SpeakerFlux

High End Performance Speaker Cable

Cable Specifications:

- α (Alpha) OCC Pure Transmission Conductors (6 x 43/0.18mm+PE cord) x 2
- Filter: cotton
- Nonmagnetic rhodium-plated banana connectors Type CF-202R and spade connectors Type CF-201R
- Dielectric/insulation: High grade PE (white/red) Dia. 6.0mm

Speaker Jumper Cables

JumperFlux



Don't constrain your system at the speaker terminals!




Jumperflux-B (banana)

Furutech Speaker Jumper Cables use high-purity large diameter 6mm-squared α (Alpha) OCC conductor for minimal internal impedance. The Jumpers feature an insulation/ dielectric of high-grade PE that reduces capacitance and resonance.

As with the Speakerflux, their use results in greater resolution, clarity, more powerful dynamics, and an ultra-quiet soundstage in which music develops more coherently.



XLR



RCA



High End Performance Line Cable

LineFlux

Cable Specifications:

- Solid α (Alpha) OCC Conductor (1.3mm x 1) x 2
- Double-layer shielding for improved noise insulation
- Insulation/Dielectric: High-grade polyethylene
- Connectors: Beautiful, hefty rhodium-plated carbon fiber and stainless steel CF-102R RCAs or CF-601MR / CF602FR XLR connectors
- Dimensions: Cable diameter approx. 13.0mm
- Overall length: 1.2M/set

Furutech Lineflux interconnects feature solid-core α (Alpha) OCC conductor, double layer shielding, and a high-grade polyethylene dielectric with insulating materials that further dampen the transmission line.

- The substantially-built extremely nonresonant RCA or XLR connectors are finished in layered carbon fiber and stainless steel with rhodium-plated pins.
- Double-layer shielding for improved noise insulation. The best damping and insulation materials available for improved frequency extension and smooth tonal balance
- Carefully engineered cable clamp improves grip reduces mechanical and electrically-induced distortion
- The results are extremely fine resolution down and through the very low noise floor, improved soundstaging and image palpability, a musical, attractive, "round" midrange, tight and controlled bass, plus power and dynamics to spare.

PowerFlux Power Cord

Fitted with CES Innovations Award Winning FI-50 Piezo Ceramic Connectors

Flux Cable Series -- Furutech α (Alpha) OCC Pure Transmission conductors terminated with beautifully-engineered high-performance rhodium-plated connectors. The substantially-built extremely nonresonant connector bodies are finished in layered carbon fiber and nonmagnetic stainless steel providing improved mechanical damping for greater resolution, clarity, and powerful dynamics.

- Piezo Ceramic series connectors feature α (Alpha) Pure Copper conductors equipped with Furutech's advanced Flux Damper Earth/Ground Jumper System (US Patent No.: 6,669,491)
- Powerflux conductors are 7 bundles 68-strands 0.127mm diameter α (Alpha) OCC conductor
- Cable features a full α (Alpha) conductor shield to protect against radiated noise

Furutech Inline filters AC Power Can Make or Break Your System!

The audio you hear from your home entertainment system is essentially the incoming electricity itself, and the typically violent storms riding the AC line and its ground is very detrimental to the performance of your components. Furutech Inline Filters eliminate many common problems caused by contaminated electrical power lines. They protect against distortion caused by ground noise, voltage spikes and sags, high frequency power supply noise from other components in your own system, and finally high-frequency digital noise emanating from processors and digital interconnects.

And while the Furutech Inline filters are star performer at eliminating common AC problems, they do it all without restricting current draw in any way. Furutech, known for its world-class Pure Transmission engineering, build and finish, have done the tests and the filters do not interfere with current draw.

Featuring Furutech's FI-68 EMI filtering IEC connectors, these new inline filter cables use Furutech's NEW - (Alpha) PC-Triple C Power cable which utilizes an ingenious proprietary forging process where variable high pressures are applied to high-purity oxygen-free copper tens of thousands of times, ultimately transforming the copper's crystal grain boundaries that were formerly in a vertical direction into a longitudinal orientation to allow the signal to flow more easily down the manufactured cable. The copper's crystals become much more well-connected and uniform, both physically and electrically, creating a much more highly conductive and sonically compelling conductor. The cables are complimented with Furutech high performance AC connectors: FI-48MR for Power Guard-48; FI-E48R for Power Guard-E18; FI-15MR Plus for Power Guard-15; FI-E11R for Power Guard-E11




Power Guard-48 Power Guard-E48 1.5 meter (4.9ft)

- Conductors: 45-strand PC Triple C 0.32mm x 3 cores
- Insulation: High-grade Flexible PVC (Brown, Light Blue, Green With Yellow Striping) OD: 5.0mm diameter approx.
- Inner Sheath: High-grade Flexible PVC (Black)
- Shielding: 0.12mm OFC Wire Braid
- Sheath: RoHS-compliant flexible PVC (Dark Green), 16.0mm diameter approx.

Power Guard-15 Power Guard-E11 1.5 meter (4.9ft)

- Conductors: 80-strand PC Triple C 0.18mm x 3 cores
- Insulation: High-grade Flexible PVC (Brown, Light Blue, Green with Yellow striping) OD: 3.5mm diameter approx.
- Inner Sheath: High-grade Flexible PVC (Black)
- Shielding: 0.12mm OFC Wire Braid
- Sheath: RoHS-compliant flexible PVC (Dark Green), 12.8mm diameter approx.

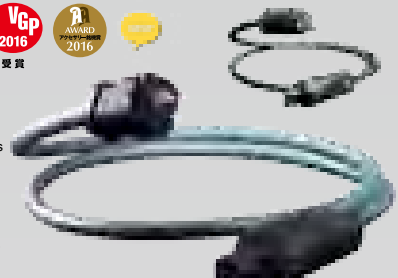

Also introducing the Flux-50 NCF Filter, Flow-28, Flow-15 Plus & Flow-08 inline power filters

Like the Power Guard series, the Flux-50 NCF Filter, Flow-28, Flow-15 Plus & Flow-08 are star performers at eliminating common AC problems, they do it all without restricting current draw in any way. AAC-1501 EMI-filtering IEC input effectively eliminates distortion.

The FI-50 NCF(R) IEC finishes off the package on the Flux-50 NCF, the FI-28R IEC connector on the Flow-28, the FI-15-Plus(G) on the Flow-15 Plus and a molded Furutech C7 IEC connector on the Flow-08.



Flux-50 NCF Filter

- For connection between power cables and power distributors or power cables and components. Eliminate and prevent radiated AC noise
- Fitted with Furutech's top-of-the-line Nano-sized Crystalline Piezo Ceramic rhodium-plated α (Alpha) nonmagnetic FI-50R NCF connector
- Floating Field Damper (Earth/Ground Jumper System) US Patent No.: 6,669,491
- Patent-pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion
- α (Alpha) conductor shield for protection against radiated noise
- Special Audio grade PE insulation contributes to reduced capacitance
- Filter held in housing with resonance damping Piezo epoxy



in-line power filter Flow-08 & Flow-28 & Flow-15 Plus

- For connection between power cables and power distributors or power cables and components. Eliminate and prevent radiated AC noise
- Floating Field Damper (Earth/Ground Jumper System) US Patent No.: 6,669,491
- Patent-pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion
- α (Alpha) conductor shield for protection against radiated noise
- Special high-grade PE Insulation contributes to reduced capacitance
- Filter held in housing with resonance damping Piezo epoxy




Furutech Inline Power Filters Lower Noise in Mixed Digital and Analog Systems

Results:

- High frequency noise (green) is substantially suppressed
- Noise suppression is effective for common-mode and normal modes so effectiveness enhanced for systems mixing digital and analog components


Fig.1 illustrates the Flux-50's common-mode noise blocking filtering effect.



Increasing time and voltage in the graph below reveals the 100V/10MHz noise in the input wave profile.

Flow-15 Plus

Fig.2 illustrates the results. Input AC 100V/10MHz noise wave profile is superimposed over AC 100V/50MHz wave profile simulating high frequency noise cutoff effect.



High Performance Power Cords



Absolute Power-15Plus 1.5 meter (4.9ft)

- 56 inner and 29 outer strands · 0.175mm diameter α (Alpha) -OCC x 3 core, 1.9mm diameter
- Sheath (Inner): RoHS Compliant Vibration Suppression PVC (Black) 9.5mm diameter
- Shielding: 9 x 24 0.12mm copper wire stranded braid
- Sheath (Outer): RoHS Compliant Flexible PVC (Dark Blue) 14.2mm diameter
- Connectors: FI-15-Plus(R) IEC and FI-15M-Plus(R)
- Europe version: FI-15-Plus(R) and FI-E11(R) schuko connector



Absolute power-15Plus E



G-314Ag-15Plus 1.5 meter (4.9ft)

A remarkably cost-effective power cord featuring 37-strand silver-plated α (Alpha) μ -OFC Conductor plus 37 strands of 0.25mm diameter α (Alpha) μ -OFC Conductor with high performance 9 by 24-strand braided α (Alpha) shield plus Furutech's advanced connectors achieving an amazing price/performance ratio. The best Furutech Power Cord bang for the buck!

- Red: 37 strand silver-plated α (Alpha) μ -OFC Conductor 0.25mm diameter
- White: 37 strand silver-plated α (Alpha) μ -OFC Conductor 0.25mm diameter
- Green: 37 strand α (Alpha) μ -OFC Conductor 0.25mm diameter
- Inner Sheath: RoHS Compliant Vibration Suppression PVC (Black) 9.3mm diameter
- Shield: 9 x 24-strand 0.12mm braided α (Alpha) Conductor
- Sheath: RoHS Compliant Flexible PVC (Brown) approx. 12.9mm diameter
- Connectors: FI-15-Plus(G) IEC and FI-15M-Plus(G) Power Connector
- Europe version: FI-15-Plus(G) and FI-E11(G) schuko connector



G-314Ag-15Plus E

Studio & Pro Audio Equipment Power Cords

The new Furutech Astoria and Empire power cords were designed for demanding professionals. Developed in Tokyo with extensive feedback from musicians and recording professionals, the Astoria and Empire power cords have been specifically tuned and balanced to deliver greater punch and dynamics to your sound. Pick the Astoria if you're aiming for quick response and natural speed, mated with deep and powerful bass. The Empire, on the other hand, offers a well-balanced sound with incredible resolution so that you hear every detail and nuance.

- Conductors: 45-strand PC Triple C 0.32mm x 3 cores
- Insulation: Audio grade Flexible PVC (Brown, Light Blue, Green with Yellow striping) OD: 5.0mm diameter approx.
- Inner Sheath: Audio grade Flexible PVC (Black)
- Shielding: 0.12mm OFC Wire Braid
- Sheath: RoHS-compliant Audio grade flexible PVC (Dark Green), 16.0mm diameter approx.



The Empire

Fitted with Gold-plated Furutech FI-11M (G) or FI-E11(G) and FI-11(G) IEC connector (1.5m)

The Astoria Fitted with Non-plated Furutech

FI-11M(Cu) or FI-E11 (Cu) and FI-11(Cu) IEC connector (1.5m)



- Conductors: 80-strand PC Triple C 0.18mm x 3 cores
- Insulation: Audio grade Flexible PVC (Brown, Light Blue, Green with Yellow striping) OD: 3.5mm diameter approx.
- Inner Sheath: Audio grade Flexible PVC (Black)
- Shielding: 0.12mm OFC Wire Braid
- Sheath: RoHS-compliant Audio grade flexible PVC (Dark Green), 12.8mm diameter approx.

Introducing the DeMaga

FURUTECH

The new and improved Furutech DeMaga completely demagnetizes LPs and optical disc media such as CD, CD-R, DVD, MD, Game CD, Photo CD, SACD, and DVD Audio with 20% increased demagnetization power than the original DeMag. Plus it's an indispensable accessory for keeping interconnect cables, connectors and power cords demagnetized to prevent magnetic signal distortion.



"... demagnetizing an LP definitively removed a high frequency glaze or glare and seemed to enrich the midband... Demagnetizing LPs works. And do not try one of these devices unless you're prepared to buy it."

— Michael Fremer, Stereophile

- Net Weight: 14.0Kgs/30.5lbs
- Rating: 110VAC ± 15V (USA)
- Rating: 230VAC ± 10V (Europe)

Licensed by Sekiguchi Machine Sales Ltd

Furutech Analog Accessories



The Silver Arrows-II Pure Silver Phono Cable achieves its remarkably quiet soundstage and elegant, nuanced sound with α (Alpha) Silver Hybrid OCC Conductors, three-layer shielding and external ground wire, even a specially engineered cable clamp to improve grip and avoid any distortion whatsoever.

The Silver Arrows-II Pure Silver conductors are terminated with beautifully engineered high-performance rhodium-plated nonmagnetic α (Alpha) OCC RCA connectors and with connector bodies finished in layered carbon fiber.

Available in three combinations: straight DIN to RCA. Angled DIN to RCA and RCA to RCA

The Silver Arrows-II Silver Hybrid OCC Conductor Phono Cable



Cable Specifications:

- α (Alpha) Silver Hybrid OCC Conductors
- Three-layer shielding for improved noise insulation
- Four-way grounding and external ground wire
- Insulation/Dielectric: Audio grade SR-PVC and Nitrogen injected skin-foam-skin polyethylene
- Connectors: Furutech-engineered rhodium-plated Carbon and Stainless finished CF-DIN connector or L-DIN connector and CF-102(R) α (Alpha) OCC RCA connectors or CF-601M XLR connectors (by request)
- Carefully engineered cable clamp improves grip and reduces mechanical and electrically-induced distortion
- Dimensions: Cable diameter approx. 10.0 mm • Overall length: 1.2M/set

The award for best performance and highest build quality at the lowest price goes to the Furutech AG-12.

— Michael Fremer, Stereophile July 2009 Vol.32 No.7

Ag-12 Pure Transmission Silver-Plated Phono Cable

The sense of mechanical integrity of the Ag-12 Tonearm cable's build is immediately apparent. Furutech Pure Transmission technology turns a macro lens on every element of power and signal transfer applying optimized engineering solutions to well-known problems such as contact resistance, grounding, EMI and RFI rejection, and using the best materials and processes available. Available in three combinations: straight DIN to RCA. Angled DIN to RCA and RCA to RCA



Cable Specifications :

- α (Alpha) silver-plated μ -OFC Conductor
- 4-layer shield construction for improved noise insulation
- Connectors: Furutech-engineered rhodium-plated DIN or L-DIN and FP-126(R) Alpha-OCC RCA connectors • The best damping and insulation materials for improved frequency extension and tonal balance
- Carefully engineered cable clamp improves grip and reduces mechanical and electrically-induced distortion
- Dimensions: Cable diameter ---9.5mm • Overall length: 1.2M/set



Monza



Monza & Monaco LP Stabilizer

Furutech employs nano-sized polycrystalline ferroelectric ceramic particles exhibiting electro generative properties and combines them with carbon powder that has thermal-conductive characteristics. These materials in the Monza and Monaco stabilizers convert electrical and mechanical oscillation energy into heat that is then conducted away and released from the surface of the Monza and Monaco, all the while providing the perfect weighted surface for your LPs. That's how far Furutech goes to achieve Pure Transmission LP playback.

Weight: Monza 350 ± 5g; Monaco 210 ± 5g



Monaco



La Source 101 Long Headshell Leads

La Source Long Silver Headshell Leads achieve their remarkably quiet soundstage and transparent presentation with pure silver conductors and a specially engineered four-point terminal for improved grip and elimination of mechanical distortion.

Top-of-the-Line Furutech Power Distributor

PURE POWER 6 NCF

Furutech have upgraded their Pure Power 6 AC Mains Distributor, the ultimate expression of Furutech's Pure Transmission Technology. Furutech engineers each and every step of power and signal transfer--no matter how small--using the finest materials and technologies available, like their proprietary Nano Crystal² Formula - Nano Crystalline, Ceramic and Carbon Powder sockets and outlets, Formula GC-303 EMI-absorbent material and Two-Stage Cryogenic and Demagnetizing Super α (Alpha) Treatment applied to all metal parts.


Luxury Build

The Pure Power 6 NCF is built like a Swiss bank vault, a virtual black hole for EMI and RFI. The substantial, beautifully-crafted chassis is precision CNC-machined from solid aerospace-grade aluminum alloy that effectively shields against RFI (Radio Frequency Interference). Three separate milled compartments house three independently-wired duplex receptacles using top-quality Fluoropolymer -shielded high-purity silver-plated Alpha-OFC. The hot and neutral conductor bundles from the FI-09 NCF IEC inlet are loomed into a large, centrally-located chamber--secured Bugatti-like with eight beautifully machined rivets--that's filled with Furutech's EMI-absorbent Formula GC-303 material. When Furutech say Pure Transmission, they mean it. Each NCF socket or NCF receptacle is additionally stabilized with Axial Locks; special factory-torqued screws anchor the back of each receptacle at two points for ultimate mechanical integrity. Four elegantly machined adjustable footers keeps the Pure Power 6 NCF stable for your system's power cords. Run digital into one duplex, analog front-end components into another, and your amplifier on the third for stunning, unrestricted, clean, stable AC power and rich, dynamic sound.



Specifications:

- Chassis: CNC machined aerospace-grade aluminum alloy
- Materials Processing: Metal parts treated with α (Alpha) Cryogenic and Demagnetizing Process
- Ground/Earth connection: Chassis Grounding Post
- IEC Inlet: FI-09 NCF (R)- α pure copper conductor rhodium-plated
- 3 High End Performance GTX-D NCF (R) Duplex Receptacles or 6 High End Performance FI-E30 NCF schuko sockets
- Internal wiring: high quality Fluoropolymer-shielded high-purity silver-plated Alpha-OFC
- Solder: Special alloy solder
- Size: 8"/250mm W x 8"/250mm H x 3"/95mm D
- Weight: 22lbs/10kgs (Schuko model: Pure Power 6-E NCF)

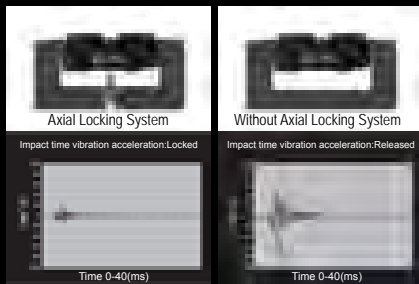

FURUTECH'S


Patented Axial Locking System
(US Patent No.: 7, 486,391 / JP Patent P4616208)

Our new Axial Locking System incorporated in f-TP615, e-TP309 and e-TP609 uses a locking set screw that anchors each duplex receptacle to prevent oscillation and enhance long-term stability and blade contact area. The torque applied to each Axial Lock is precisely matched with the 3M material's density for best isolation characteristics.

The results show Furutech's patent pending Axial Locking System -- hand-torqued to optimum values during assembly -- reduces noise, oscillation and vibration by a factor of almost ten times!


Piezo Isolating Footers

Resonance Damping Measurement with and without Piezo Isolating Footers. Test Method: FFT analysis using a small microphone attached to the e-TP609 AC power distributor with four Piezo Isolating Footers placed on a vibrating base.

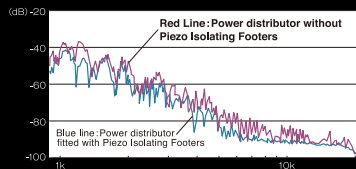


The results show that above 4kHz there is an amazing 10dB of resonance suppression, and in tests without Furutech's Piezo Isolating Footers peaks completely vanish at 13kHz. Also with this type of measuring system there is some residual noise, so in actual fact one can expect even greater improvement in vibration and resonance suppression when connected to your system!

e-TP309 NCF e-TP309E NCF AC Power Distributor

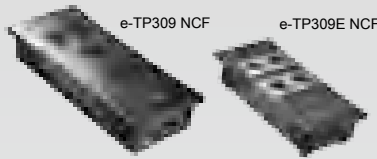

- All conductors treated with Furutech's α (Alpha) Cryogenic and Demagnetizing Process
- Nonmagnetic rhodium-plated α (Alpha) pure copper GTX-D NCF High End Performance Receptacles with a special anti-resonance nano-sized crystalline, piezo ceramic particles and carbon damping material
- Furutech's Axial Locking System lowers receptacle resonance by a factor of 10
- Piezo nano-ceramic and carbon damping isolator footers
- IEC Inlet: rhodium-plated FI-09 NCF (R) α pure copper conductors
- A layer of Formula GC-303 bonded to the bottom plate effectively shields against EMI (Electro Magnetic Interference)
- Star-wired conductors using Furutech α (Alpha)-10, 5.5 sq. mm (10 AWG) for low electrical resistance, conductors insulated within resonance-absorbing tubing
- Also available in 230V schuko model (e-TP309E NCF)

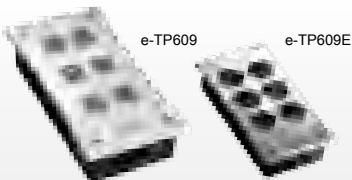


e-TP609 & e-TP609E AC Power Distributor



"...In practice, the e-TP609 yields a noticeable reduction in background noise and grunge, coupled with a smooth, organic sound that allows music's natural beauty to flow freely."
—Chris Martens, The Absolute Sound Product of the Year Award 2007

- Features Axial Locking System • GC-303 EMI-Absorbent Internal Coating
- Nonmagnetic rhodium-plated α (Alpha) pure copper GTX-D High End Performance Receptacle Parts.
- Receptacles featuring nylon/fiberglass bodies incorporating carbon particles forming an extremely effective nonresonant connector body
- Chassis CNC machined from solid aluminum block equipped with Piezo nano-ceramic and carbon damping isolator footers (stainless spikes optional)
- Special Vibration Dampening Coating.
- Outputs: 6 Outlets
- Input: 15A/125V • 10A/250V IEC
- Rated: 15A/125V
- Also features Furutech's FI-09 Rhodium-Plated Pure copper IEC Inlet
- Also available in 230V schuko model (e-TP609E)
- US Patent No.: 7, 486,391 / JP Patent P4616208





f-TP615 & f-TP615E Filtered Power Distributor



- Nonmagnetic 24k gold-plated α (Alpha) phosphor bronze Pure Transmission High End Performance Receptacles with nylon/fiberglass bodies incorporating nano-size ceramic particles that absorb vibration and resonance
- Piezo nano-ceramic and carbon damping isolator footers
- Furutech Axial Locking System
- AC-1501-- Nonmagnetic 24k gold-plated α (Alpha) copper alloy conductor Noise Filter Inlet
- Layer of Formula GC-303 bonded to bottom plate effectively shields against EMI (Electro Magnetic Interference)
- Star-wired with Furutech α (Alpha)-22, 3.8 sq. mm (12 AWG) for low electrical resistance insulated with resonance absorbing tubing
- Also available in 230V schuko model (f-TP615E)
- US Patent No.: 7, 486,391 / JP Patent P4616208

e-TP80 & e-TP80E AC Power Filter Distributor



"As good as it gets... a solid value, and the perfect choice for those looking in this price range for a flexible, musical, and well-designed power line conditioner." Robert Levi, Positive Feedback Online

- 4 filtered and 4 non-filtered AC Power Distributor featuring Hyper Quality non-magnetic 24K gold-plated receptacles, GC-303 EMI-Absorbent Internal Coating.
- GC-303 EMI-Absorbent Internal Coating and an EMI noise filter
- Outputs: 8 outlets (4 Filtered 4 Non-Filtered) • Input: 15A IEC
- 15A/125V
- Also available in 230V schuko model (e-TP80E)




e-TP60 & e-TP60E AC Power Distributor

AC Power Distributor featuring GC-303 EMI-Absorbent internal coating; all metal parts treated with Furutech's Cryogenic and Demagnetizing Alpha Process.

- GC-303 EMI-Absorbent Internal Coating
- Outputs: 6 Outlets • Input: 15A IEC
- 15A/125V
- Also available in 230V schuko model (e-TP60E)

Audio / Video / Digital Cable

Following on from the success of the Furutech GT2 USB cable Furutech now introduces the higher specified GT2Pro 2.0 USB cable. The cable is formed around special α (Alpha) OCC silver copper hybrid conductors with superior high-density polyethylene insulation/dielectric. The GT2Pro features three-layer shielding and specially engineered 24k gold-plated USB 2.0 connectors with a special 24k gold-plated copper alloy EMI shield incorporated into the connector. The cable wrap includes damping and insulating materials keeping mechanical ringing from affecting the sound. A carefully engineered clamp improves grip and keeps both mechanical and electrical distortion at bay. The GT2Pro series creates real musical experience from the data stored on your computer.

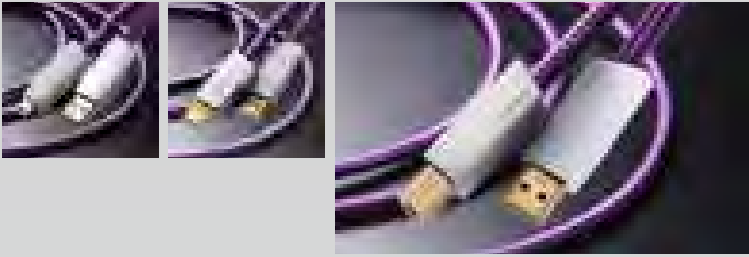

GT2Pro USB Cable

- Main conductor: 26AWG α (Alpha) OCC Silver Copper hybrid Conductors
- Power conductor: 24AWG Silver-plated α (Alpha) OCC Conductors
- Main Insulation: Special-grade high-density polyethylene
- 3-layer shield construction for improved noise insulation
- Connectors: Furutech-engineered 24k gold-plated USB series Connectors with a special 24k gold-plated copper alloy EMI shield incorporated into the connector
- The best damping and insulation materials for improved frequency extension and tonal balance
- GT2Pro-B (Type A to B) and GT2Pro -mini B (Type A to mini-B) Lengths :
- Cable Lengths: 0.3m (1ft) / 0.6m (2ft) / 1.2m (4ft) / 1.8M (6ft) / 3.6m (12ft) / 5.0m (16.5ft)




The GT2 is a beautifully engineered and built USB 2.0 cable for enthusiasts with growing music collections on their computer hard drives looking for high performance sound. Furutech turned its Pure Transmission engineering talents toward creating the highest quality 2.0 USB cable possible. They begin with silver-plated α (Alpha) OCC conductors and a special-grade high-density polyethylene insulation/dielectric. The cable wrap includes damping and insulating materials keeping mechanical ringing from affecting the sound. A carefully engineered clamp improves grip and keeps both mechanical and electrical distortion at bay. The result is clear and open highs, elegant midrange textures, powerful but in-control bass, an enhanced sense of the sheer palpability of the music you'll enjoy.



GT2 USB Cable

- Main conductor: Silver-plated α (Alpha) OCC Conductors
- 3-layer shield construction for improved noise insulation
- Connectors: Furutech-engineered 24k gold-plated USB series Connectors
- Cable Types: GT2 USB-A (Type A-A) / USB-B (Type A-B) / USB-mini B (Type A-mini B)
- Cable Lengths:
 - USB-A (Type A-A)---1.2m (4ft) / 1.8M (6ft)
 - USB-B (Type A-B) / USB-mini B (Type A-mini B)---0.6m (2ft) / 1.2m (4ft) / 1.8M (6ft) / 3.6m (12ft) / 5.0m (16.5ft)



LAN-7 Ethernet Cable

Category 7 (STP/ Class F)

- The LAN-7 is a beautifully engineered and built Category 7 STP twisted pair cable for Ethernet and other high-speed signal transfer.
- Category 7 is backward compatible with Categories 5e and 6. It also features improved specifications for crosstalk and system noise than Category 6a with added shielding for each individual wire pair and the cable as a whole. Besides the additional shielding, the LAN-7 features twisted pairs with the number of twists per unit length increasing RF shielding and protecting from crosstalk.
- Category 7 cable allows 10 Gigabit Ethernet over 100m and frequencies of up to 600 MHz.
- Main conductor wire: 24 AWG Silver plated α (Alpha) OCC conductor for minimal transmission loss.
- RJ45(8P8C) Connector: α (Alpha) non-magnetic 24k Gold-plated conductor with 24k Gold-plated copper alloy body that has minimal magnetic properties.
- 3 Layered Shielding with superior noise isolation aluminum foil and copper braiding.
- The best damping and insulation materials for improved frequency extension and tonal balance
- Jacket: 84A UL/CL2 approved flammability grade; RoHS Compliant Flexible PVC (Black). OD: 7.0 \pm 0.15mm approx.
- Production Lengths: 0.6M/1.2M/1.8M/2.5M/3.6M/5M other sizes by request.

There is a popular misconception that inexpensive HDMI cables perform as well as more costly designs and that digits are just digits. They said the same about SPDIF digital cables, but it's generally accepted now that they do, and in fact the length of the cable matters in avoiding internal reflections that cause timing errors. The design, materials and build quality of every cable counts, especially with HDMI having to cope with greater and greater bandwidth. Meticulous attention to build quality is a large part of the Pure Transmission engineering equation.

HDMI-xv1.3 cable is engineered to work flawlessly in lengths up to 5 meters with new-generation 120-Hz LCD and plasma screens and is 3D and 4K compatible. Furutech Pure Transmission technology turns a macro lens on every element of power and signal transfer applying optimized engineering solutions to well-known problems such as contact resistance, EMI and RFI rejection using the best materials and processes available. Top Japanese Audio/Video commentator Tadashi Yamanouchi reports, "This is THE HDMI cable to realize the true potential of your video source."



- Successfully completed ATC Compliance testing at the HDMI Authorized Testing Center---Silicon Image (1.3b Cat.2 / 1080P / 10.2 Gbps / 16 bit max.)
- Main Conductor: α (Alpha) conductor (24 AWG Silver plated μ -OFC Solid wire) for ultra low transmission loss.
- HDMI Connector non-magnetic 24K Gold-Plated α (Alpha) contacts
- 5 Layer Shielded conductors for superior noise isolation.
- Production Lengths: 1M/2M/3M/5M

HDMI-xv1.3



- Main conductors: Nonmagnetic α (Alpha) silver-plated μ -OFC for minimal transmission loss
- HDMI connector: Nonmagnetic 24k gold-plated α (Alpha) conductor with 24k gold-plated nonmagnetic copper alloy body
- Triple shielding assures superior noise isolation
- Available in 1.2m/2.5m/5m/8m/10m/12m/15m lengths

HDMI-N1-4

3D and 4K compatible(1.2M-8M length)

Exceptionals



destat III

Improved destat III Removes Dust and Static for Ultimately Refined Sound Zap!

The destat III is incredibly easy to use and removes dust and static charge from audio/video media with a few seconds. High performance enthusiasts know that static charges on analog and optical media - LPs, CDs and DVDs - can lead to sudden and distracting noise that compromises the experience. Simply place your media on or hold it under the destat III and press one button! The powerful fan removes dust while the destat III's improved Ion Flow Generator -featuring 4 emitters that simultaneously generate static-eliminating ions.

Requires 4 AA Batteries (Included)



Electrostatic Brush

SK-III

For disk media (CDs, DVDs, LPs) AV Projector lenses, Plasma/LCD Screen

The new SK-III features a rhodium coated metal grounding sleeve for improved conductivity and 10% more super fine Corona discharge fibers. Remove electrostatic charge from audio and visual media resulting in a great improvement in sound or picture quality. This revolutionary product, so simple to use, will change your listening or viewing experience for good. See and hear a difference can be realized in minutes. Experience what the product that has become such a great hit among Japanese high-end audio and home theater fans.



PC α Pure Cleaner

Keeps CDs, DVDs and video/PC/Smartphone screens clean and free of static charge Based on combination of enzymes and ions, this pure, natural product has a powerful cleansing action on any CD or DVD. It maximizes the laser's ability to read the data producing a very high level of resolution. PC α is totally free of pollution-causing materials including active agents and chemical skin irritants. PC α is environmental friendly and extremely safe to use. Even with its powerful cleaning action, PC α is harmless to most surfaces. Because there are no oily additives, it leaves no residual trace, the treated surface is sparkling clean and ready for a life of zero-failure reads.



High End Performance

NANO Liquid Contact Enhancer

Revives old connections and improves new connections Incredible Nano Liquid's molecules are so tiny (8 nano-meters in diameter (8/1000000mm) they "fill up" any air bubble holes left during the plating process when brushed onto connectors. The result is much better contact between metal surfaces. Nano Liquid is a result of Furutech's Total Attention to Detail regarding every aspect of signal transmission. Use only a little!

High End Performance Reference III Series Cables

"...If you are an audiophile and music lover who subscribes to the philosophy that the components in your system should be as accurate and neutral as possible, and that the cables' main job is to be an undistorted conduit, then the Furutech Reference III cables should be at the top of your list..."

— Jeff Dorgay, *Tone Audio* 2009




Double-shielded α (Alpha)-OCC conductor interconnects, power cords and digital cables featuring extraordinary build quality and Formula GC-303 antimagnetic EMI-absorbent modules surrounding the cable offering greater resolution, more powerful dynamics, and virtuoso performances from all your components.



High End Performance Interconnect Audio Reference III RCA 1.2 meter (3.9ft)

- 30-strand α (Alpha)-OCC Conductor · 0.18mm, 1.14mm diameter
- Insulation: 30% air-foamed HDPE (Red/White) 2.60mm diameter
- Shield-1: 0.12mm braided α (Alpha) Conductor braid density: 80% UP / 6.3mm diameter
- Shield-2: Special EMI- and noise-absorbent Formula GC-303 module
- Connectors: FP-106(R) RCA



High End Performance Interconnect Audio Reference III XLR 1.2meter (3.9ft)

- 30-strand α (Alpha)-OCC Conductor · 0.18mm, 1.14mm diameter
- Insulation: 30% air-foamed HDPE (Red/White) 2.60mm diameter
- Shield-1: 0.12mm braided α (Alpha) Conductor braid density: 80% UP / 6.3mm diameter
- Sheath: RoHS Compliant flexible PVC (Dark Brown) 8.0mm diameter
- Shield-2: Special fiberglass and copper wire stranded braid
- Shield-3: Special EMI- and noise-absorbent Formula GC-303 module
- Connectors: FP-603 M(R) and FP-604 F(R) XLR



High End Performance Power Cables Power Reference III 1.8 meter (5.9ft)

- 49-strand α (Alpha)-OCC · 0.32mm x 3 cores, 2.5mm diameter
- Insulation: Irradiated PE (Red/Natural/Yellow) 5mm diameter
- Inner Sheath: RoHS Compliant Vibration Suppression PVC (Black) 12mm diameter
- Outer Sheath: RoHS Compliant flexible PVC (Dark Green) 15mm diameter
- Shield: Special EMI- and noise-absorbent Formula GC-303 module
- Connectors: FI-25(R) IEC and FI-25M(R) Power Connector
- Europe version: FI-25(R) IEC and FI-E35(R) schuko connector



High End Performance Speaker Cable Speaker Reference III-04 2 meter (6.5ft) Speaker Reference III-06 3 meter (9.8ft)


- 6 bundles of 20-strand α (Alpha)-OCC Conductor · 0.16mm, 2.7mm diameter
- Insulation: Air-foamed Irradiated PE (Red/White) 5.1mm diameter
- Cable Lay: Two cores twisted together
- Sheath: RoHS Compliant flexible PVC (Purple/Red) 13mm diameter
- Shield: Special EMI- and noise-absorbent Formula GC-303 module
- Jacket: Nylon yarn braid approx. 14.5mm
- Connectors: FP-201(R) spade terminal or FP-202(R) Bananas by request



High End Performance Digital Datalink Digital Reference III XLR / RCA 1.2 meter (3.9ft)

- XLR Specifications:
- 30-strand α (Alpha)-OCC Conductor · 0.18mm, 1.14mm diameter
 - Insulation: 30% air-foamed HDPE (Red/White) 2.60mm diameter
- RCA/BNC Specifications:
- 37-strand α (Alpha)-OCC Conductor · 0.16mm, 1.15mm diameter
 - Insulation-1: HDPE 1.75mm diameter
 - Insulation-2: Air-formed PE, 5.5mm diameter

- Common Specifications:
- Shield-1: 0.12mm braided α (Alpha) Conductor braid density: 80% UP x 6.3mm diameter
 - Sheath: RoHS Compliant flexible PVC (Dark Brown) 8.0mm diameter
 - Shield-2: Special fiberglass and copper wire stranded braid
 - Shield-3: Special EMI- and noise-absorbent Formula GC-303 module
 - Connectors: FP-603 M(R) and FP-604 F(R) XLR or FP-106(R) RCA or FP-3-117(R) BNC



High End Performance Speaker Cable Bi-Wire Speaker Reference III-04 2 meter (6.5ft) Bi-Wire Speaker Reference III-06 3 meter (9.8ft)


- Shielded α (Alpha)-OCC Conductors eliminate radiated noise: 6 bundles of 25-strand α (Alpha)-OCC Conductor · 0.16mm for Treble, 6 bundles of 41-strand α (Alpha)-OCC Conductor · 0.16mm for Bass

- High performance beautifully engineered and finished with nonmagnetic Rhodium-Plated pure copper spades
- Results in greater resolution, clarity, powerful dynamics, and an ultra-quiet soundstage in which music develops more fully without artificial upper-frequency "presence region" glare.
- Formula GC-303 Antimagnetic EMI-Absorbent Modules surround each cable allowing a deeper, tighter bass to form a solid foundation for the rest of the frequency range, better defining the original recording's venue. Natural, unforced detail reveals nuance and energy for an engaging musical experience.
- Connectors: FP-201(R) spade terminal or FP-202(R) Bananas by request

Evolution II Series Cables


"...Furutech's cables offer great transparency and purity, plus an uncanny ability to block out noise and grunge..."

— Chris Martens *The Absolute Sound Editors' Choice Awards 2007*



High Performance Audio Interconnect Evolution Audio II RCA 1.2meter (3.9ft)

- 80-strand α (Alpha)-OCC Conductor · 0.18mm, 1.86mm diameter
- Insulation: Polypropylene (Red, White) 2.46mm diameter
- Cable Lay: Two cores twisted together with cotton yarn
- Cable Wrap: Non-woven fabric wrap approx. 5.0mm
- Shield: 0.12mm braided α (Alpha) Conductor 6.3mm diameter
- Sheath: RoHS Compliant Flexible PVC (Dark Green) 9.0mm diameter
- Jacket: Nylon yarn braid approx. 10mm
- Connectors: FP-110(G) RCA




High Performance Audio Interconnect Evolution Audio II XLR 1.2meter (3.9ft)

- 80-strand α (Alpha)-OCC Conductor · 0.18mm, 1.86mm diameter
- Insulation: Polypropylene (Red/White) 2.46mm diameter
- Cable Lay: Two cores twisted together with cotton yarn
- Cable Wrap: Non-woven fabric wrap approx. 5.0mm
- Shield: 0.12mm braided α (Alpha) Conductor approx. 6mm diameter
- Sheath: RoHS Compliant Flexible PVC (Dark Green) 9.0mm diameter
- Jacket: Nylon yarn braid approx. 10mm
- Connectors: FP-701 M(G) and FP-702 F(G) XLR



High Performance Audio Digital Cable Evolution Digital II XLR 1.2meter (3.9ft)

- α (Alpha) μ -OFC Conductor 1.3mm diameter
- Insulation: Polypropylene (White/Red) 2.4mm diameter
- Shield: 0.12mm α (Alpha) Conductor wire braid
- Sheath: RoHS Compliant flexible PVC (Dark Green) 8mm diameter
- Jacket: Nylon yarn braid approx. 9.5mm
- Connectors: FP-701 M(G) and FP-702 F(G) XLR



High Performance Digital Cable Evolution Digital II RCA 1.2meter (3.9ft)

- 37-strand α (Alpha)-OCC Conductor · 0.16mm, 1.15mm diameter
- Insulation-1: HDPE 1.75mm diameter
- Insulation-2: Air-foamed PE 5.5mm diameter
- Shield-2: 0.12mm braided α (Alpha) Conductor, 6.3mm diameter
- Sheath: RoHS Compliant flexible PVC (Dark Blue) 8mm diameter
- Jacket: Nylon yarn braid approx. 9.5mm
- Connectors: FP-110(G) RCA or FP-3-117(R) BNC.



High Performance Audio Speaker Cable Evolution Speaker II-04 2 meter (6.5ft) Evolution Speaker II-06 3 meter (9.8ft)

- 6 bundles 20-strand α (Alpha) μ -OFC Conductor · 0.18mm, 2.81mm diameter
- Insulation: Special polyethylene (Red/White) 5.1mm diameter
- Cable Lay: Two cores twisted together with cotton yarn
- Sheath: RoHS Compliant flexible PVC (Dark Green) 13.5mm diameter
- Jacket: Nylon yarn braid approx. 14.5mm
- Connectors FP-203(G) spade or FP-202(G) Banana



High Performance Audio Power Cable Evolution Power II 1.8 meter (5.9ft)

- 7 bundles 35-strand α (Alpha) μ -OFC Conductor 0.18mm x 3 cores, 3.69mm diameter
- Insulation: Polyethylene (Red/Natural/Yellow) 5.5mm diameter
- Sheath (Inner): RoHS Compliant Vibration Suppression PVC(Black) 13.5mm diameter
- Shield: 9 x 24-strand 0.12mm copper stranded wire braid
- Sheath: RoHS Compliant Flexible PVC (Pearl Blue) Diameter: 17.5mm
- Jacket: Nylon yarn braid approx. 18.5mm
- Connectors: alpha pure copper conductor FI-11(R) IEC Connector and FI-11M(R) Power Connector
- Europe version: FI-11(R) IEC Connector and FI-E11(R) Schuko Connector



Nano Crystal² Formula - Nano Crystalline, Ceramic and Carbon Powder

Incorporated into Furutech NCF products, Nano Crystal² Formula --- NCF is comprised of a special crystalline material that has two "active" properties. First, it generates negative ions that eliminate static and secondly, it converts thermal energy into far-infrared. Furutech then combines this remarkable crystalline material with nano-sized ceramic particles and carbon powder for their additional "Piezo Effect" damping properties. The resulting Nano Crystal² Formula is the ultimate electrical and mechanical damping material – only found in Furutech NCF products!

Features:

- α (Alpha) Pure-Copper Rhodium-plated Conductor
- Earth (Ground) Jumper System (US Patent No.: 6,669,491/European:EP1445837)
- Nylon/fiberglass body with a special anti-resonance nano-sized crystalline, piezo ceramic particles and carbon damping material
- Specified for cable diameters from 6mm to 20mm
- Metal cable clamp improves grip and reduces mechanically and electrically induced distortion
- Dimensions:
 - FI-50 NCF Body length 44mm x 34.5mm diameter / 80.3mm overall length
 - FI-50M NCF Body length 40mm x 34.5mm diameter / 76.2mm overall length
 - FI-E50 NCF Body length 55.4mm x 39.5mm diameter / 93.2mm overall length
 - FI-52 NCF Body length 41.1mm x 34.5mm diameter / 77.2mm overall length
 - FI-52M NCF Body length 40mm x 34.5mm diameter / 75.8mm overall length
- Rating:
 - FI-50 NCF ---15A 125V /10A 250V AC
 - FI-50M NCF ---15A 125V AC
 - FI-E50 NCF ---16A 250V AC
 - FI-52 NCF ---20A 125V /16A 250V AC
 - FI-52M NCF ---20A 125V AC



NCF Piezo Ceramic Series AC Connectors • A Furutech First!

Furutech's Pure Transmission FI-50 NCF Piezo Ceramic series connector bodies and housings feature several breakthrough construction techniques. A multilayer nonmagnetic stainless steel and silver plated carbon fiber shell incorporates a special damping and insulating acetal copolymer. Furutech settled on stainless and silver plated carbon fiber for the outer housing after extensive listening sessions with Japanese industry figures and audiophiles. The body of the connectors incorporates NCF damping material: Nano Crystal² Formula - Nano Crystalline, Ceramic and Carbon Powder. Nano Crystal² Formula eliminates static, "interconverts" thermal, mechanical and electrical energy and damps vibrations—all for the finest Furutech Pure Transmission signal imaginable.

The Furutech Earth/Ground Jumper System

Furutech's total attention to detail and elegant engineering neatly solves the problem. The Earth/Ground Jumper System connects the securing screws to a ground terminal within the plug completely eliminating the field disturbances they cause. The stray fields are grounded by a series of interlocking parts within the connector that attach to the ground conductor.

Features:

- Rhodium-plated α (Alpha) Pure Copper Conductor (0.8mm) Nonmagnetic stainless conductor spring system
- Body material: Nylon/fiberglass with a special anti-resonance nano-sized crystalline, piezo ceramic particles and carbon damping material
- Cover material: Polycarbonate with a special anti-resonance nano-sized crystalline material "NCF"
- Parts set with nonmagnetic 2.0mm-thick stainless brace plate
- Specified for wire diameters of 4mm (set screw)
- Dimensions: 104.0 mm (L) x 47.2 mm (W) x 28.0 mm (H)




GTX-D

NCF Nano Crystal² Formula

Furutech's Top-Tier GTX-D NCF Receptacles



The GTX-D NCF manifests a devotion to best performance in every element of AC and signal transfer. Of course everyone would love to make pure-copper receptacles, but its malleability – lack of stiffness – makes pure copper a poor choice. That's why you'll find phosphor bronze or brass in most receptacles. Furutech's intense engineering scrutiny has resulted in an industry-first, a technique allowing us to use special Furutech rhodium-plated α (Alpha) pure copper conductors strengthened and sprung by our innovative nonmagnetic Stainless Steel Conductor Spring System that keeps a firm grip yet won't damage male connector blades or their plated surfaces. But what really sets the GTX-D NCF receptacle apart is "NCF" – Furutech's ultimate damping material - Nano Crystal² Formula eliminates static, "interconverts" thermal, mechanical and electrical energy and damps vibrations. The GTX-D NCF can be summed up in a word; virtuoso!



FI-06 NCF

Features:


- α (Alpha) Pure-Copper Rhodium-plated Conductor
- Materials: Nylon/fiberglass with special "NCF" anti-resonance damping material - nano-sized crystalline, piezo ceramic particles and carbon powder
- Specifications: Accommodates wire diameters up to 3.5mm (set-screw)
- Dimensions: 50.5 (W) x 23.9mm (D) x 33.5mm (H) ± 0.1mm
- Rated: 15A/250V



FT-SWS NCF

Features:

- α (Alpha) Pure Copper Main Conductor (t : 0.5mm)
- 1.0mm thick Bracket with a Zinc/steel brace plate
- Carbon fiber finished Cast Zn-Mg Alloy Front Plate
- Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw)
- Dimensions: 95.0mm (L) x 95.0mm (W) x 48.0mm(H)
- Rating: 16A 250V A.C.



FI-E30 NCF

Features:

- Main conductors: α (Alpha) Pure copper Rhodium plated
- Dimensions: 50.6mm x 50.6mm x 36.0mm (L x W x H)
- Rating: 16A 250V A.C.



FT-SDS NCF

Features:

- α (Alpha) Pure Copper Main Conductor (t: 0.5mm)
- 1.0mm thick Zinc/steel brace plate Base Bracket
- Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw)
- Dimensions: 54.8mm (L) x 54.8mm (W) x 52.0mm(H)
- Rating: 16A 250V A.C.

The Furutech Floating Field Damper* Solving the Biggest Problem You Didn't Know You Had


Noise and vibration are primary causes of signal transmission distortion, and controlling them is vital to achieving stable, minimal-loss AC power transfer. Most audiophiles and video enthusiasts assume plugging a power cord into a wall receptacle is the point at which electrical potentials or disturbances are generated; everyone has created a small spark plugging in a device that was On rather than Off. But research has shown that there are many elements in a connector capable of creating stray electrical potentials such as cable clamps, screws and other magnetic parts.

Magnetic Floating Field Damping

Current flowing through a cable and its connector creates magnetic (and electrostatic) fields around them, building and collapsing 60 times per second in 120VAC systems. This magnetic field induces current flow—electrical potential—in small parts like the screws holding the connector shell together which have to be metal for tight clamping. The current flow in these small parts actually creates “floating” magnetic fields around them, and they interfere with the cable/connector’s larger surrounding magnetic field resulting in noise and distortion.

Conventional AC connector without Floating Field Damper

Noise voltage radiated from power source envelopes the body of a connector which is in a floating field state

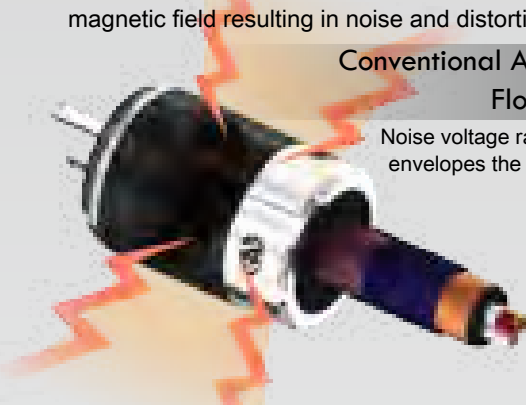

AC connector with Furutech Floating Field Damper

Floating field damper ties the housing to ground, preventing radiated noise voltage from surrounding the connector



The Furutech Floating Field Damper solves the biggest problem you never realized you had by star grounding the metal parts in which floating magnetic fields are induced by current flow. As represented in the images below, a precisely engineered, sprung metal bridge in the connector body ties the various metal parts together and shunts whatever electrical potentials generated to ground. This significantly lowers noise by reducing distortion for ultra-clean and stable power transfer.

Innovations Award-Winning FI-50 Piezo Connector Series and New FI-50 NCF Series

The FI-50 NCF series and FI-50 series connectors are crafted from nonmagnetic stainless steel covered with six-layers of piezo-conductive carbon fiber with all metal parts tied to ground with the Floating Field Damper so any noise generated within or around the connector is shunted to ground.

1.Green:

Attenuation of radiated voltage/noise from a power supply line with Floating Field Damper

2.Blue:


Attenuation of radiated voltage/noise surrounding the housing of the connector with Floating Field Damper

The data clearly illustrates that the Floating Field Damper stabilizes power supplied to sensitive audio components while greatly reducing distortion caused by radiated noise voltage resulting in increased low-level information and distortion free, dynamic and clear sound.

The Earth/Ground Jumper System is available in Furutech NEMA/Schuko and IEC Connectors.

* We've renamed our patented Earth/Ground Jumper System to better describe the circuit's engineering and effects.
US Patent No. 6,669,491/European Patent : EP1445837.

The graph below illustrates the Floating Field Damper curbing noise generated between 100kHz and 1GHz.

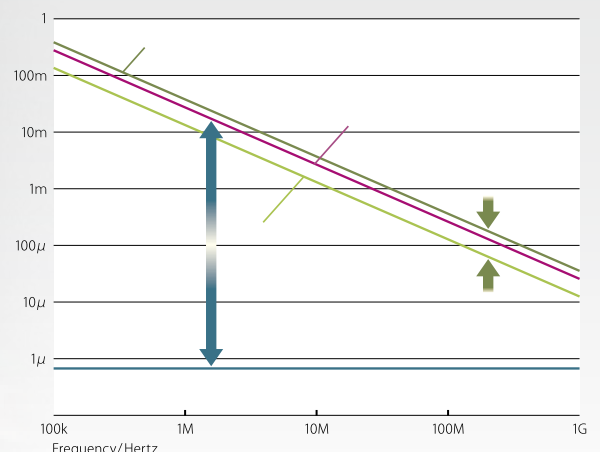

Piezo Ceramic & Carbon Series Connectors


Piezo Ceramic Series Connectors • A Furutech First!

The body of the connectors combines two "active" materials: Nano-sized ceramic particles and powdered carbon. (Only nano-sized ceramic particles effectively couples with carbon powder.) Nylon and fiberglass are incorporated as well forming an extremely effective, well damped, mechanically and electrically nonresonant connector body. That's correct; they're electrically damped as well.

Piezoelectric effects are the key. Furutech's breakthrough in design and materials is based on employing nano-sized polycrystalline ferroelectric ceramic particles exhibiting electro-generative properties; mechanical pressure creates an electrical charge forming a bridge between electrical and mechanical oscillation.

Carbon powder exhibits thermal-conductive characteristics that interact with the charged ferro-ceramic particles converting their energy into heat that's conducted away and released from the surface of the connector body!

These carefully chosen and tested "active" materials mechanically and electrically damp the connector and receptacle as they "interconvert" thermal, mechanical, and electrical energy for the finest Furutech Pure Transmission signal imaginable.



FI-50(R) IEC Power Connector

FI-50M(R) AC Power Connector

FI-52(R) 20A IEC Power Connector

FI-52M(R) 20A AC Power Connector

FI-E50(R) SCHUKO Power Connector

- α (Alpha) pure-copper rhodium-plated conductors
- Floating Field Damper function (US Patent No.: 6,669,491)
- Piezo Ceramic series connector bodies incorporate ceramic nano-sized particles, carbon powder, nylon and fiberglass
- Multilayered nonmagnetic stainless steel and carbon fiber housing incorporates a special damping insulating acetal copolymer
- Specified for cable diameters from 6mm to 20mm
- Patent pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion plus patent-pending specially engineered pressure plate

The New FI-48 series feature new resonance damping nonmagnetic stainless steel housings with Piezo Nano Ceramic damping technology incorporated into the connector bodies.

FI-48(R) & FI-48M(R)

Rhodium-Plated

- Rhodium-plated α (Alpha) Pure copper main Conductor
- Floating Field Damper System* prevents induced magnetic fields (US Patent No.: 6,669,491/European Patent (EP1445837))
- Piezo Ceramic series connector bodies incorporate ceramic nano-sized particles, carbon powder, nylon and fiberglass main body and Polycarbonate inner cover plate.
- Beautiful polish finished Nonmagnetic SUS housing
- Specified for cable diameters of 6.0mm to 20.0mm (Wire diameters of 5.5mm² (10AWG) max.)
- Stainless and Nylon fiberglass cable damping clamp with stainless screws
- Connection: Set screw

FI-48(R) • Dimensions: Body length 56.7mm x 39.5mm diameter x 92.0mm overall length.

• Polycarbonate cable damping clamp with stainless screws

FI-48M(R) • Dimensions: Body length 40.2mm x 40.5mm diameter x 75.1mm overall length.

• Stainless and Nylon fiberglass cable damping clamp with stainless screws

FI-E48(R)

Rhodium-Plated

- Rhodium-plated α (Alpha) Pure copper main Conductor
- Floating Field Damper System* prevents induced magnetic fields (US Patent No.: 6,669,491/European Patent (EP1445837))
- Piezo Ceramic series connector bodies incorporate ceramic nano-sized particles, carbon powder, nylon and fiberglass main body and Polycarbonate inner cover plate.
- Beautiful polish finished Nonmagnetic SUS housing
- Specified for cable diameters of 6.0mm to 20.0mm (Wire diameters of 5.5mm² (10AWG) max.)
- Stainless and Nylon fiberglass cable damping clamp with stainless screws
- Connection: Set screw
- Dimensions: Body length 56.7mm x 39.5mm diameter x 92.0mm overall length.



High End Performance Power and IEC Connectors

The FI-28 series feature new resonance damping metal clamps and the FI-28 IEC has pure copper α (Alpha) conductors.



FI-28(R)

Rhodium-Plated

- α (Alpha) Pure copper Conductor parts
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))

FI-28(G)

24k Gold-Plated

- Nylon/fiberglass front body • polycarbonate shell
- Specified for cable diameters of 6.6mm to 17.5mm
- Patent pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion plus patent-pending specially engineered pressure plate
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: Body length 43.9mm x 39.6mm diameter x 76.2mm overall length
- Rated: 15A/125V 10A/250V

FI-28M(R)

Rhodium-Plated

- α (Alpha) Pure copper Conductor parts
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon/fiberglass front body • polycarbonate shell
- Specified for cable diameters of 6.6mm to 17.5mm

FI-28M(G)

24k Gold-Plated

- Patent pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion plus patent-pending specially engineered pressure plate
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: Body length 40.2mm x 39.6mm diameter x 72mm overall length
- Rated: 15A/125V

FI-12L(R)



FI-12ML(R)



FI-E12L(R)



High Performance Angled Power Connector Series
The world's first high-end grade angled power connectors. All versions with adjustable angle settings (4 settings) and featuring Furutech's top rhodium-plated α (Alpha) pure-copper conductors.



- Rhodium-plated α (Alpha) pure-copper conductors
- Floating Field Damper System (US Patent No.: 6,669,491)
- Nylon/fiberglass body incorporating carbon particles that absorb vibration and resonance
- Specified for cable diameters from 6.6mm to 18.0mm
- Metal cable clamp improves grip and reduces mechanically and electrically induced distortion
- Dimensions: Housing-44.0mm X 42.2mm X 55.0mm
- FI-12L(R) --- 70.6mm Overall Length X 42.2mm X 55.0mm Approx.
- FI-12ML(R) --- 66.4mm Overall Length X 42.2mm X 55.0mm Approx.
- FI-E12L(R) --- 84.0mm Overall Length X 42.2mm X 55.0mm Approx.
- Rating: FI-12L(R)---10A 250V /15A 125V AC // FI-12ML(R)--- 15A 125V AC // FI-E12L(R)---16A 250V



FI-11-N1(R) Rhodium-Plated

- α (Alpha) Phosphor bronze Conductor
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon/fiberglass front body, polycarbonate shell
- Specified for cable diameters of 6.6mm to 16mm (With a longer screw up to 20mm)
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: Body length 43.9mm x 39mm diameter x 76.8mm overall length
- Rated: 15A/125V 10A/250V



FI-11M-N1(R) Rhodium-Plated

- α (Alpha) Pure Copper Conductor
- Features improved plating and new metal cable clamp for resonance damping and firm grip
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon/fiberglass front body, polycarbonate shell
- Specified for cable diameters of 6.6mm to 16mm (With a longer screw up to 20mm)
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: Body length 40.0mm X 39.0mm dia. X 73.0mm overall length
- Rated: 15A/125V



FI-11-N1(G) 24k Gold-Plated FI-11-N1(Ag) Silver Plated

- α (Alpha) Phosphor bronze Conductor
- Features improved plating and new metal cable clamp for resonance damping and firm grip
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon/fiberglass front body, polycarbonate shell
- Specified for cable diameters of 6.6mm to 16mm (With a longer screw up to 20mm)
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: Body length 43.9mm x 39mm diameter x 76.8mm overall length
- Rated: 15A/125V 10A/250V



FI-11M-N1(G) 24k Gold-Plated

- α (Alpha) Pure copper Conductor
- Features improved plating and new metal cable clamp for resonance damping and firm grip
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon/fiberglass front body • Polycarbonate shell
- Specified for cable diameters of 6.6mm to 16mm (With a longer screw up to 20mm)
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: Body length 40.2mm x 39mm diameter x 73mm overall length
- Rated: 15A/125V



FI-11(Cu) Unplated

- α (Alpha) Phosphor bronze Conductor
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon/fiberglass front body, polycarbonate shell
- Specified for cable diameters of 6.6mm to 16mm (With a longer screw up to 20mm)
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: Body length 43.9mm x 39mm diameter x 76.8mm overall length
- Rated: 15A/125V 10A/250V



FI-11M(Cu) Unplated

- α (Alpha) Pure copper Conductor
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon/fiberglass front body • Polycarbonate shell
- Specified for cable diameters of 6.6mm to 16mm (With a longer screw up to 20mm)
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: Body length 40.2mm x 39mm diameter x 73mm overall length
- Rated: 15A/125V



FI-C15(R) Rhodium-Plated FI-C15(G) 24k Gold-Plated

- Rhodium or 24k gold-plated α (Alpha) Pure copper Conductor
- Nylon /fiberglass main body and inner cover plate.
- Specified for cable diameters of 6.6mm to 16.0mm (Wire size of 3.5 square mm (12AWG) max.)
- Polycarbonate cable damping clamp with stainless screws
- Connection: Set screw
- Dimensions: 22.0mm X 30.0mm X 83.2mm overall length.
- Rating: 15A 125V / 10A 250V A.C.



The Suppressor (CF-080 AC Connector Damping Ring)

- Body: CNC Lathe the stainless steel
- Outer Cover Finish: Silver-Color Carbon Fiber
- Fixing Screws: 3 SUS screws 3 x 3mm
- Dimensions: 44.5φ x 37.0 ± 0.3mm (L) overall length approx.

In highly resolved audio systems EVERYTHING makes a difference. The Suppressor Ring is a substantially-built silver-colored carbon fiber over nonmagnetic stainless steel damper ring with three fixing screws. It accommodates Furutech FI-11-N1 and FI-28 series connectors. If your Furutech power cores are not equipped with FI-50 AC connectors adding the Suppressor Ring is the next best thing for low distortion playback.

FI-15-Plus(R)

Rhodium-Plated

FI-15-Plus(G)

24k Gold-Plated

- Rhodium or 24k gold-plated α (Alpha) Pure copper Conductor
- Floating Field Damper System* prevents induced magnetic fields
- (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon /fiberglass main body and inner cover plate.
- Specified for cable diameters of 6.6mm to 15.0mm (Wire size of 5.5 square mm (10AWG) max.)
- Polycarbonate cable damping clamp with stainless screws
- Connection: Set screw
- Dimensions: 35.0mm X 34.0mm X 72.5mm overall length.

FI-15M-Plus(R)

Rhodium-Plated

FI-15M-Plus(G)

24k Gold-Plated

- Rhodium or 24k gold-plated α (Alpha) Pure copper Conductor
- Floating Field Damper System* prevents induced magnetic fields
- (US Patent No.: 6,669,491/European Patent (EP1445837))
- Nylon /fiberglass main body and inner cover plate.
- Specified for cable diameters of 6.6mm to 15.0mm (Wire size of 5.5 square mm (10AWG) max.)
- Polycarbonate cable damping clamp with stainless screws
- Connection: Set screw
- Dimensions: 35.0mm X 34.0mm X 72.2mm overall length.

FI-15E (Cu)

Unplated

FI-15ME (Cu)

Unplated

- α (Alpha) Pure copper Conductor
- Floating Field Damper function (US Patent No.: 6,669,491)
- Nylon and fiberglass housing
- Specified for cable diameters of 6.6mm to 13mm
- Wire accommodation: Max. 3.5 square mm Max. 12 AWG
- FI-15E(Cu): Dimensions: 31mm x 33.3mm x 72.0mm overall length
- Rated: 15A/125V 10A/250V
- FI-15ME(Cu): Dimensions: 31mm x 33.3mm x 72.0mm overall length
- Rated: 15A/125V

FI-8N(R)

Rhodium-Plated


FI-8N(G)

24k Gold-Plated

- Furutech's unique female conductor design features α (Alpha) Beryllium copper and Phosphor Bronze conductors
- Material: Nylon/ fiber glass body/caver and polycarbonate cable clamp.
- Specified for cable outer diameters of 6.0mm ~ 13.0mm
- Wire accommodation: Max. 2.4mm dia.(Solid core) // 2.0 Sq.mm/14AWG (Strand wire)
- Connections: Set screw.
- Dimensions: 36.8mm X 28.2mm X 71.0 mm ± 0.5mm overall length
- Rated: 7A/125V 2.5A/250V



High End Performance EMI filter IEC Connector (World First)

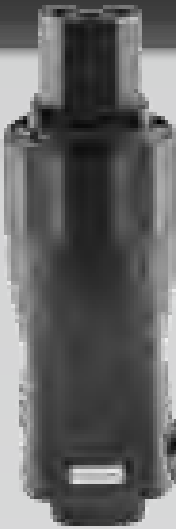

The Furutech FI-68 Noise Filter IEC connector effectively removes all of that high-frequency EMI (Electric Magnetic Interference) noise from the mains power before it reaches your components—all without robbing your system of the high frequencies that are responsible for that airy, 3-D sound that's so natural and lifelike. Dynamic contrasts, you'll discover, are unaffected as well. To use the FI-68 Noise Filter IEC connector, you simply connect it to power cords and use between the wall AC mains outlets, power distributors or hi-fi components.



FI-68(R)
Rhodium-Plated

FI-68(G)
Gold-Plated

- The body of the FI-68 filter combines two "active" materials: Nano-sized ceramic particles and powdered carbon plus Nylon and fiberglass to form an extremely effective mechanically and electrically damped body
- Fitted with nonmagnetic 24k gold-plated or rhodium-plated α (Alpha) pure copper connector parts
- A parallel circuit with an in-line coil and capacitor that reduces noise at 100KHz by 8dB and at 500KHz by 14 dB and at 10MHz by more than 30dB
- Floating Field Damper™ (Earth/Ground Jumper System) with US Patent No.: 6,669,491/ European Patent (EP1445837)
- Nylon /fiberglass main body and inner cover plate.
- Specified for cable diameters of 6.6mm to 15.5mm (Wire size of 5.5 square mm (10AWG) max.)
- Connection: Set screw with ID.: 3.5~4mm "O" type terminal
- Dimensions: 40.6mm diameter X 121mm overall length
- Rating : AC 115V/250V 15A 50/60Hz

High End Performance 20A Components

We feature an expanding range of beautifully engineered and built, reliable, and very effective 20A components to deliver a dynamic and powerful sound and significantly improved picture quality.

FI-32M(R)
FI-32(R)
Rhodium-Plated
20A AC Connector

- High End Performance 20A Connectors
- α (Alpha) Pure Copper Conductor
- Earth (Ground) Jumper System (US Patent No.: 6,669,491/European Patent (EP1445837))
- Patent pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion plus patent-pending specially engineered pressure plate
- Nylon/fiberglass front body • Polycarbonate shell
- Specified for cable diameters of 6.6mm to 17.5mm
- Wire accommodation: Max. 5.5 Square mm Max. AWG 10
- Rated: FI-32(R):20A/125V ,FI-32M(R):20A/125V16A/250V



FI-31(G)
24k Gold-Plated 20A IEC

- High Performance 20A Connectors
- α (Alpha) Phosphor bronze Conductor
- Earth (Ground) Jumper System.
- Material: Nylon/fiberglass • Polycarbonate shell
- Specified for cable diameters of 6.6mm to 20.0mm
- Wire accommodation: Max. 5.5 square mm Max. AWG 10
- Rated: 20A/125V 16A/250V



High End Performance EMI filter IEC inlets

The AC-1501 and AC-1001 eliminate common AC problems without restricting current draw in any way. Furutech, known for its world-class Pure Transmission engineering, build and finish, have done the tests and these inlets do not interfere with current draw. Parallel circuit with an in-line coil and capacitor reduces noise at 100KHz by 8dB and at 500KHz by 14 dB and at 10MHz by more than 30dB

AC-1501(R)
Rhodium-Plated

AC-1001(G)
Gold-Plated

- Rhodium-Plated or 24k Gold-Plated α (Alpha) non-magnetic copper alloy conductors
- Outer cover- Cr Plated steel plate
- Inner cover- Nylon glass fiber
- Inner Box- Nylon glass fiber
- Inner parts held by Piezo Epoxy
- AC-1001 Rating:115V/250V 10A 50/60Hz
- AC-1501 Rating:115V/250V 15A 50/60Hz

FI-09 NCF(R)
Rhodium-Plated



FI-09(R)
Rhodium-Plated

FI-09(G)
24k Gold-Plated

- α (Alpha) Pure copper Conductor
- Materials: Nylon/fiberglass
- Specifications: Accommodates cable diameters to 4mm (set-screw)
- Wire accommodation: Max. 5.5 square mm Max. 10 AWG
- Dimensions: 60 (W) x 30mm (D) x 36.2mm (H)
- Rated: 15A/250V

FI-03(R)
Rhodium-Plated

FI-03(G)
24k Gold-Plated

FI-33NCF(R)
Rhodium-Plated



FI-33(R)
Rhodium-Plated

FI-33(G)
24k Gold-Plated

- α (Alpha) Copper Alloy Conductor
- Nylon and fiberglass housing
- High grade contact fuse holder
- Dimensions: 44.0mm (W) x 28.6mm (D) x 33.0 (H)
- Rated: 10A/250V
- Standard : IEC 320-1 C14
- Approvals : UL/CSA/VDE/DEMKO/SEMKO/NEMKO/FIMKO/KTL/CCC

- High End Performance 20A IEC Inlet
- α (Alpha) Pure copper Conductor
- Material: Nylon/fiberglass
- Rated: 20A/125V and 16A/250V

High Performance IEC Inlets

FI-06 NCF(R)
Rhodium-Plated



FI-06(R)
Rhodium-Plated

FI-06(G)
24k Gold-Plated

- α (Alpha) Pure Copper Conductor
- Materials: Nylon/fiberglass
- Accommodates wire diameters up to 3.5 square mm Max. 12 AWG (set-screw)
- Dimensions: 50.5 (W) x 23.9mm (D) x 33.5mm (H) \pm 0.1mm
- Rated: 15A/250V Connection: Set screw
- Approvals : UL/CSA



INLET(R)
Rhodium-Plated

INLET(G)
24k Gold-Plated

- α (Alpha) Eutectic (low temperature) cast Copper Alloy Conductor
- PBT and fiberglass housing
- Connections: Soldered
- Dimensions: 49. 5mm (W) x 22.0mm (D) x 27.5 mm (H)
- Rated: 15A/250V(for UL,CSA),10A/250V(for Others)
- Approvals : UL/CSA/VDE/ KEMA/DEMKO/SEMKO/NEMKO/FIMKO/ KTL/CCC



High End Performance 20A 125V Duplex and Single Receptacles

Furutech's Top 20A 125V Duplex and Single Receptacles Top-Tier GTX-D NCF rhodium plated duplex receptacle



GTX-D(R)

Rhodium-Plated duplex receptacle

GTX-D(G)

Gold-Plated duplex receptacle



- Rhodium or gold-plated α (Alpha) Pure Copper Conductor (0.8mm)
- Nonmagnetic stainless conductor spring system
- Materials: Nylon/fiberglass body and polycarbonate cover; parts fixed with a 2.0mm-thick stainless brace plate
- Specified for wire diameters of 4mm (set screw)
- Dimensions: 104.0mm (L) x 47.2mm (W) x 28.0mm(H)



GTX-S(R)

Rhodium-Plated single receptacle

GTX-S(G)

Gold-Plated single receptacle

NCF Nano Crystal[®] Formula



Of course everyone would love to make pure-copper receptacles, but its malleability – lack of stiffness – make pure copper a poor choice. That's why you'll find phosphor bronze or brass in some receptacles. Furutech's intense engineering scrutiny has resulted in an industry-first, a technique allowing us to use special Furutech 24k gold- or rhodium-plated α (Alpha) pure copper conductors strengthened and sprung by our innovative nonmagnetic Stainless Steel Conductor Spring System that keeps a firm grip yet won't damage male connector blades or their plated surfaces. Even the screw-down pressure plates are curved to maximize contact area.

US Patent No. 8,133,064

All NCF products please reference P.9



High End Performance 15A or 20A 125V Duplex Receptacle



Many A/V enthusiasts go to great lengths in carefully setting up major system components, but pay little attention to AC power. Furutech knows that each and every part of the chain is as important as the next, so maximum attention is lavished by Furutech's engineers on all aspects of power transfer to set new benchmarks of performance.

Unique pin insert construction ensures increased contact areas, stable transmission and the tightest contacts in the Audio industry and they won't scratch or mark the plating on male AC connectors!

FPX(R)

FPX(G)


FPX(Cu)



- α (Alpha) Phosphor Bronze Conductor (t : 0.8mm)
- Material: Nylon/fiberglass body, Polycarbonate cover;

- Specified for wire diameters of 4mm (set screw) 10 AWG to 24 AWG.
- Dimensions: 104.2mm x 33.5mm (L x W), 28.2mm thick.
- Approvals : UL/CSA

GTX Wall Plate

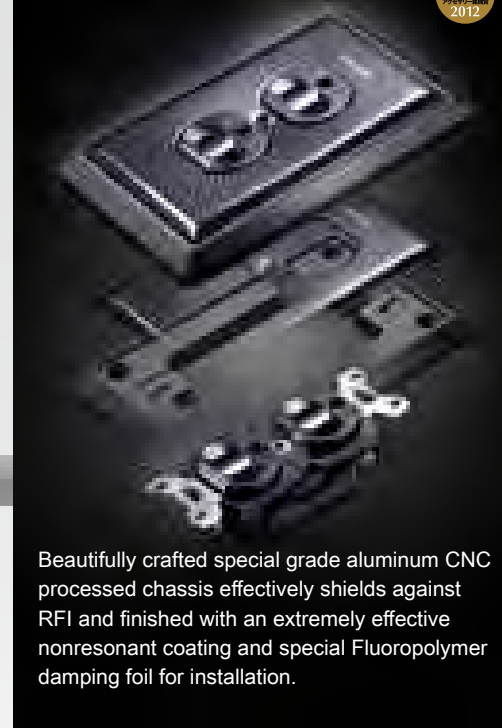

Beautifully crafted special grade aluminum CNC processed chassis effectively shields against RFI and finished with an extremely effective nonresonant coating and special Fluoropolymer damping foil for installation.

High End Performance Single and Double Receptacle Covers



Outlet cover 104-S/104-D

The Pure transmission 104-D duplex Receptacle Cover Plate features the best material combination for resonance damping -- nonmagnetic stainless steel finished in carbon fiber. This plate cover has been designed for use with Furutech's NEMA GTX and FPX series receptacles.

Outlet cover 102-S/102-D

The 102-D duplex and 102-S single Receptacle Cover Plates are stainless steel and employ stainless screws. The remarkable Piezo Material used on the back of these superb receptacle cover plates reduces mechanically-induced distortion using the principles of molecular friction and piezoelectric loss to remarkable effect in improving every aspect of sound and image reproduction

High End Performance Audio Accessories

"One last comment has to go to the finish of the connectors ... Tolerances are spot on, the stuff goes in smoothly, locks and unlocks without any undue play ... There's something luxurious and silken about the Furutech connectors. Like fine Swiss watches. This stuff also routes and drapes easily. ... Since it does perform to a very high standard, getting the tactile satisfaction and pride of ownership bits thrown into the bargain is worth mentioning.

– **Srajan Ebaen, 6moons.com**

Carbon Fiber Series Connectors

High End Performance DIN Connector CF-DIN(R)

- Rhodium-plated α (Alpha) Phosphor bronze conductor
- Fluoropolymer insulated Body
- Nonmagnetic stainless steel Housing
- Conductor wire fixed by soldering.
- Specified for cable diameters max. 11.0mm
- Dimensions: CF-DIN—14.2mm diameter x 40.2mm overall length

High End Performance RCA Connector CF-102(R)

- α (Alpha) OCC rhodium-plated center conductor
- α (Alpha) Copper Alloy rhodium-plated Body
- Carbon fiber and nonmagnetic stainless steel Housing
- Conductor wire fixed by set screw
- Specified for cable diameters max. 9.3mm
- Dimensions: 14.0mm diameter x 54.0mm overall length
- Featuring specially engineered set screw construction to ensure firm contact with Alpha OCC conductor



High End Performance Spade Connector CF-201(R)

- α (Alpha) Pure Copper rhodium-plated center conductor
- α (Alpha) Nonmagnetic stainless steel body
- Carbon fiber and Nonmagnetic stainless steel housing
- Conductor wire fixed by screw set or soldering.
- Specially designed fixed wire construction to ensure the stability of the conductor's contact.
- Specified for wire diameters max. 5.5mm
- Dimensions: 15.2mm diameter x 70.0mm overall length
- Featuring specially engineered set screw construction to ensure firm contact with Alpha Pure Copper conductor
- US Patent No.: 7,976,352 / JP Patent P5020344



High End Performance BNC Connector CF-BNC(R) 75 Ω

- Nonmagnetic Rhodium-plated α (Alpha) Phosphor bronze conductor
- Insulation with Fluoropolymer PTFE Resin
- Housing: Nonmagnetic stainless and carbon fiber finished.
- Cable Clamp: Copper Alloy.
- Specified for wire outer diameters up to 8.0mm
- Connections: Soldered
- Dimensions: Housing— \varnothing 13.4mm x 22 mm length; Total overall length: 43.9 mm approx.

High End Performance Banana Connector CF-202(R)

- α (Alpha) Pure Copper rhodium-plated center conductor
- α (Alpha) Nonmagnetic stainless steel body
- Carbon fiber and Nonmagnetic stainless steel housing
- Conductor wire fixed by screw set or soldering.
- Specially designed fixed wire construction to ensure the stability of the conductor's contact.
- Specified for wire diameters max. 5.5mm
- Dimensions: 15.2mm diameter x 64.2mm overall length
- Featuring specially engineered set screw construction to ensure firm contact with Alpha Pure Copper conductor
- US Patent No.: 7,976,352 / JP Patent P5020344



High End Performance XLR Connector CF-601M(R) CF-602F(R)

- α (Alpha) Beryllium copper and phosphor bronze Rhodium-plated Conductor
- Carbon fiber and nonmagnetic stainless steel housing
- Body: PVDF insulation
- Specially designed internal cable strain relief.
- Connections: Soldered
- Specified for cable diameters up to 10.0mm (Standard version)
- CF-601M R Dimensions: 18.6mm \pm 0.1mm diameter x 65.5mm \pm 0.1mm overall length.
- CF-602F R Dimensions: 18.6mm \pm 0.1mm diameter x 77.4mm \pm 0.1mm overall length.

High End Performance RCA Connector CF-126(R)

- α (Alpha) -OCC Conductor center pin
- Copper Alloy body and Fluoropolymer insulation
- Connections: Soldered
- Specified for cable diameters up to 7.3mm
- Dimensions: 13.0mm \pm 0.1mm diameter x 39.3mm overall length

High End Performance Headphone Connectors

2.5mm 4 Pole Balanced Connector CF-7254(R)

- Main conductor: Nonmagnetic Rhodium-plated α (Alpha) Pure copper conductor
- Ground conductor: Nonmagnetic Rhodium-plated α (Alpha) Copper Alloy.
- Insulation: Special audio grade P.P Resin
- Housing: Nonmagnetic stainless and carbon fiber finished.
- Cable Clamp: Copper Alloy
- Specified for core insulation diameters up to 5.3mm
- Connections: Soldered

2.5mm 4 Pole Balanced Connector FT-7254(R)

- Main conductor: Nonmagnetic Rhodium-plated α (Alpha) Pure copper conductor
- Ground conductor: Nonmagnetic Rhodium-plated α (Alpha) Copper Alloy.
- Insulation: Special audio grade P.P Resin
- Housing: Nonmagnetic stainless.
- Cable Clamp: Copper Alloy
- Specified for core insulation diameters up to 5.0mm
- Connections: Soldered

Headphone Connectors CF-H800

- Nonmagnetic Rhodium-plated α (Alpha) Phosphor bronze conductor
- Insulation with Nylon+Fiberglass15% Resin
- Main Body: Nonmagnetic stainless with Carbon Fiber finish
- End Ring: Nonmagnetic stainless.
- Fixed Tube: Copper Alloy.
- Connections: Soldered
- Specified for core insulation diameters up to 3.8mm

Headphone Connectors FT-H800

- Nonmagnetic Rhodium-plated α (Alpha) Phosphor bronze conductor
- Insulation with Nylon+Fiberglass15% Resin
- Main Body: Nonmagnetic stainless.
- End Ring: Nonmagnetic stainless.
- Fixed Tube: Copper Alloy.
- Connections: Soldered
- Specified for core insulation diameters up to 3.8mm

6.3mm Stereo Connectors FT-763SM(R)

- Nonmagnetic Rhodium-plated α (Alpha) Phosphor bronze
- Insulation: audio grade Nylon Glass Fiber Resin
- Housing: Nonmagnetic stainless.
- Cable Clamp: Copper Alloy.
- Specified for core insulation diameters up to 8.0mm
- Connections: Soldered

6.3mm Stereo Connectors CF-763SM(R)

- Conductor: Nonmagnetic Rhodium-plated α (Alpha) Phosphor bronze
- Insulation: audio grade Nylon Glass Fiber Resin
- Housing: Nonmagnetic stainless with Carbon Fiber finish.
- Cable Clamp: Copper Alloy.
- Specified for core insulation diameters up to 8.0mm
- Connections: Soldered

3pin mini XLR Female Connector FT-608mF

- Nonmagnetic Rhodium-plated α (Alpha) Phosphor bronze conductor
- Super heat resistant Polyphenylene Sulfide Resin Insulation for best soldering results
- Housing: Nonmagnetic stainless.
- Cable Clamp: Superior Damping Copper Alloy.
- Specified for core insulation diameters up to 5.0mm
- Connections: Soldered

4pin mini XLR Female Connector FT-610mF

- Main conductor: Nonmagnetic Rhodium-plated α (Alpha) Phosphor bronze conductor
- Super heat resistant Polyphenylene Sulfide Resin Insulation for best soldering results
- Housing: Nonmagnetic stainless (Black)
- Cable Clamp: Superior Damping Copper Alloy.
- Specified for core insulation diameters up to 5.0mm
- Connections: Soldered

3.5mm Stereo Connector CF-735SM(R)

- Main conductor: One piece Nonmagnetic Rhodium-plated α (Alpha) Pure copper conductor
- Ground conductor: Nonmagnetic Rhodium-plated α (Alpha) Copper Alloy.
- Insulation :audio grade Nylon Glass Fiber Resin
- Housing: Nonmagnetic stainless and carbon fiber finished.
- Cable Clamp: Copper Alloy
- Specified for core insulation diameters up to 5.3mm
- Connections: Soldered

3.5mm Stereo Connectors FT-735SM(R)

- Main conductor: One piece Nonmagnetic Rhodium-plated α (Alpha) Pure copper conductor
- Ground conductor: Nonmagnetic Rhodium-plated α (Alpha) Copper Alloy.
- Insulation :audio grade Nylon Glass Fiber Resin
- Housing: Nonmagnetic stainless.
- Cable Clamp: Copper Alloy
- Specified for core insulation diameters up to 5.0mm
- Connections: Soldered

F35(R) Rhodium plated F35(G) 24k Gold-plated

- 6.3mm stereo to 3.5mm stereo adaptor
- Rhodium-plated & 24k Gold-Plated α (Alpha) Phosphor bronze
- Insulation: POM resin.
- Housing Material: SUS 304.
- Overall Size: 10.6mm \varnothing X 61.0mm (L) approx.

F63-S(R) Rhodium plated F63-S(G) 24k Gold-plated

- 3.5mm stereo to 6.3mm stereo adaptor
- Rhodium-plated & 24k Gold-Plated α (Alpha) Phosphor bronze
- Insulation: POM resin.
- Housing Material: SUS 304.
- Overall Size: 9.5mm \varnothing X 48.5mm(L) approx.



2pin Connector FT-2PS-F

- Nonmagnetic Rhodium-plated α (Alpha) Phosphor bronze conductor
- Insulation body injected with Liquid Crystal Polymer Resin
- Housing cover: Matte black finished Nylon/fiberglass with piezo ceramic finish.
- Cable Clamp: Copper Alloy for best damping effect.
- Specified for core insulation diameters up to 3.5mm

High End Performance RCA Connectors

Our beautifully made RCAs feature Rhodium-plated non-magnetic phosphor bronze filament center pins at the perfect spring rate to maintain secure contact. Our locking RCA connectors ensure even greater stability and reliability.



Rhodium-Plated FP-106F(R)



- α (Alpha) Phosphor bronze Filament center pin
- Copper Alloy body and locking collet • Fluoropolymer insulation
- Connections: Set screw
- Specified for cable diameters up to 9.3mm
- Dimensions:
13.8mm \pm 0.1mm diameter x 54.3mm \pm 0.1mm overall length



Rhodium-Plated FP-108(R)




- α (Alpha) -OCC Conductor center pin
- Copper Alloy body and locking collet • Fluoropolymer insulation
- Connections: Set screw
- Specified for cable diameters up to 9.3mm
- Dimensions:
13.8mm \pm 0.1mm diameter x 54mm \pm 0.1mm overall length



24k Gold-Plated FP-110(G)

- α (Alpha) -OCC Conductor center pin
- Copper Alloy body and locking collet • Fluoropolymer insulation
- Connections: Soldered
- Specified for cable diameters up to 9.3mm
- Dimensions: 13.8mm \pm 0.1mm diameter x 51.5mm overall length



FP-126(R) Rhodium-Plated FP-126(G) 24k Gold-Plated

- α (Alpha) -OCC Conductor center pin
- Copper Alloy body and Fluoropolymer insulation
- Connections: Soldered
- Specified for cable diameters up to 7.3mm
- Dimensions: 12.6mm \pm 0.1mm diameter x 39.3mm overall length



Rhodium-Plated FP-120F(R)

- α (Alpha) Phosphor bronze Filament center pin
- Copper Alloy body and locking collet • Fluoropolymer insulation
- Connections: Soldered
- Specified for cable diameters up to 12.3mm
- Dimensions:
13.8mm \pm 0.1mm diameter x 61.2mm \pm 0.1mm overall length




FT-111(R) Rhodium-Plated FT-111(G) 24k Gold-Plated



The FT-111 features an α (Alpha) pure copper one piece conductor for minimal impedance and nonmagnetic SUS set screw construction design, extremely nonresonant SUS housing and POM insulated body

- α (Alpha) One piece Pure Copper tube conductor
- Plus polarity: α (Alpha) Pure copper tube injected with POM resin
- Housing: Nonmagnetic Stainless steel.
- Insulation Body: Injection Black POM Resin.
- Connections: Set screws
- Specified for core insulation diameters up to 10.0mm
- End Ring: Anodized Aluminum
- Housing dimensions: --- ϕ 14.0mm x 26.5mm overall length
Total overall length: 50.6 mm approx.



High Performance Audio BNC Connector

Rhodium-Plated FP-3-117(R)

- α (Alpha) Copper Alloy center pin
- Rhodium-plated Copper Alloy body with Fluoropolymer insulation
- Connections: Soldered
- Specified for cable diameters up to 8mm
- Dimensions: 14mm \pm 0.1mm diameter x 43mm \pm 0.1mm overall length
- 75 Ω \pm 3 Ω

High Performance Audio RCA Connectors



24k Gold-Plated FP-160(G)

- α (Alpha) Copper Alloy center pin
- Copper Alloy body and locking collet • Fluoropolymer insulation
- Connections: Soldered
- Specified for cable diameters up to 9.3mm
- Dimensions:
14.8mm \pm 0.1mm diameter x 52.1mm \pm 0.1mm overall length



24k Gold-Plated FP-162(G)



- α (Alpha) Copper Alloy center pin
- Copper Alloy body and Fluoropolymer insulation
- Connections: Soldered
- Specified for cable diameters up to 7.3mm
- Dimensions:
11.9mm \pm 0.1mm diameter x 37.3mm \pm 0.1mm overall length

High Performance Audio Banana Connectors



FP-200B(R) Rhodium-Plated FP-200B(G) 24k Gold-Plated

- α (Alpha) Phosphor bronze pins
- Connections: Set-screw
- Specified for wire diameters up to 5mm
- Dimensions: Housing--- ϕ 10.8 mm X 30 mm L ;
Banana Conductor--- ϕ 4.4 mm X 19.5 mm L
- Overall length : 49.50 mm.



FP-202(R) Rhodium-Plated FP-202(G) 24k Gold-Plated

- α (Alpha) Copper Alloy pins
- Connections: Set-screw
- Specified for wire diameters up to 5.5mm
- Dimensions:
12mm diameter , 26.7mm \pm 0.1mm (H) x 46mm overall length



FT-212(R) Rhodium Plated FT-212(G) 24k Gold-Plated



The FT-212 features an α (Alpha) pure-copper conductor yielding minimal impedance. The conductor is housed in an extremely nonresonant POM resin body with a shell crafted of nylon and fiberglass using Furutech's outstanding Piezo Ceramic damping material. The pin locks feature a new patent-pending mechanism for a secure, reliable grip. It's difficult to find better...

- Main conductor: Rhodium or 24k gold-plated α (Alpha) pure copper
- Housing: Black nylon/fiberglass with Piezo Ceramic resin
- Body Insulation: Black POM resin injection
- Termination: Set screw
- Specified for core diameters up to 4.2mm
- Specified for core insulation diameter up to 7.8mm
- End Ring: Stainless steel
- Dimensions: Housing: 18.0 X 16.0 ϕ x 19.8mm (H) overall height
Total overall length: 56.0 mm approx.

High End Performance XLR Connectors



- α (Alpha) Beryllium copper and phosphor bronze Conductor
- Copper Alloy end housing
- PVDF Fluoropolymer insulation
- Connections: Soldered
- Specified for cable diameters up to 12mm
- Dimensions:
FP-601M: 19.5mm ± 0.1mm diameter x 48.5mm ± 0.1mm overall length
FP-602F: 19.5mm ± 0.1mm diameter x 54.2mm ± 0.1mm overall length

High Performance XLR Connectors



- α (Alpha) Copper Alloy center pin
- Copper Alloy end housing
- PBT/fiberglass insulation
- Connections: Soldered
- Specified for cable diameters up to 9mm
- Dimensions:
FP-701M: 21.3mm ± 0.1mm diameter x 63.2mm ± 0.1mm overall length
FP-702F: 19.5mm ± 0.1mm diameter x 64.2mm ± 0.1mm overall length

24k Gold-Plated FP-701M(G) FP-702F(G)

High Performance Audio Spade Terminals



FT-211(R) Rhodium Plated
FT-211(G) 24k Gold-Plated



The FT-211 features an α (Alpha) pure-copper conductor yielding minimal impedance. The conductor is housed in an extremely nonresonant POM resin body with a shell crafted of nylon and fiberglass using Furutech's outstanding Piezo Ceramic damping material. It's difficult to find better...

- Main conductor: Rhodium or 24k gold-plated α (Alpha) pure copper
- Housing: Black nylon/fiberglass with Piezo Ceramic resin
- Body Insulation: Black POM resin injection
- Termination: Set screw
- Specified for core diameters up to 4.5mm
- Specified for core insulation diameter up to 7.8mm
- End Ring: Stainless steel
- Dimensions: Housing: 18.0 X 16.0^φ x 19.8mm overall height
Total overall length: 57.5 mm approx.



FP-209-10(R)
FP-209-10(G)


Rhodium-Plated
Spade Terminal 10pcs/set
24k Gold-Plated
Spade Terminal 20pcs/set

- α (Alpha) non-magnetic pure copper (t:1.0mm)
- Dimensions: Spade Size: Outside 8mm Inside 4.3 mm Overall length: 25 mm.
- Maximum wire gauge : 8 AWG
- Rhodium-Plated version by request
- Perfect for use with large gauge wiring of Furutech wall receptacles GTX and FPX receptacles and Furutech AC connectors.



FP-201(R) Rhodium-Plated
FP-201(G) 24k Gold-Plated

- α (Alpha) Pure copper Conductors
- Connections: Screw down or soldered
- Specified for wire diameters up to 5.0mm
- Dimensions: Space between Conductor: 8.0mm
12.9mm ± 0.1mm (W) x 40mm ± 0.1mm overall length



FP-203(R) Rhodium-Plated
FP-203(G) 24k Gold-Plated

- α (Alpha) Pure copper Conductors
- Connections: Press down or soldered
- Specified for wire diameters up to 4mm
- Dimensions: Space between Conductor: 8.2mm
12.9mm ± 0.1mm (W) x 24mm ± 0.1mm overall length

High End Performance XLR Sockets

The FT-785M / 786F series XLR sockets feature α (Alpha) pure copper conductors for minimal impedance set in a super heat resistant liquid crystal polymer resin and a non-resonant nylon/fiberglass housing that incorporates Furutech's super-effective Piezo Ceramic Damping Material. Unique to these special Furutech XLR sockets are special nonmagnetic stainless steel plates that are incorporated into the piezo compound construction using a special Furutech patent-pending process. Pure Transmission principles at their finest!

Solder XLR Socket

Rhodium Plated Male socket

FT-785M(R)

Rhodium Plated Female socket

FT-786F(R)



- α (Alpha) Pure Copper gold-plated or rhodium-plated main conductor
- Insulation Housing: Matte black finished Nylon/fiberglass with piezo ceramic resin (SUS plated internal parts)
- Pin holder & Conductor Inner insulation: Liquid Crystal Polymer Resin
- Connections: Soldered
- Dimensions:
FT-785M— 32.0 X 27.0 x 32.7mm (H) overall height
FT-786F— 32.0 X 27.0 x 36.9mm (H) overall height

High Performance Phone Jacks

24k Gold-Plated(Mono)
FP-703(G)

24k Gold-Plated(Stereo)
FP-704(G)



- α (Alpha) Copper Alloy center pin
- Copper Alloy end housing with PBT / fiberglass insulation
- Specified for cable diameters up to 8mm
- Connections: Soldered
- Zn-Mg Alloy Casting body housing

High Performance Solder



S-070-10

- Construction : 96% Sn + 4% Ag. (Lead Free)
- Rosin Type : Ersin 362Flux , 5 core
- Flux Temp. : Around 380~450°C
- Diameter : 0.7 mm
- Package : 10M (32.8ft) / Roll

High End Performance Phono-DIN Connector series



FP-DIN
FP-DIN(L)

- Rhodium-plated α (Alpha) Phosphor bronze conductor
- Fluoropolymer Insulated Body
- Nonmagnetic stainless steel Housing
- Conductor wire fixed by soldering.
- Specified for cable diameters max. 10.0mm

High Performance Crimp Sleeves



GS Series

- 24k Gold-plated non-magnetic α - Conductor
- Material: Pure Copper tube
- Gauges: 2, 4, 8, 10, 12, 14, 20AWG
- GS-11P (I.D. :1.1mm X Overall length: 6mm) for 20 AWG
- GS-21P (I.D. :2.1mm X Overall length: 10mm) for 14 AWG
- GS-28P (I.D. :2.8mm X Overall length: 10mm) for 12 AWG
- GS-35P (I.D. :3.5mm X Overall length: 10mm) for 10 AWG
- GS-46P (I.D. :4.6mm X Overall length: 10mm) for 8 AWG
- GS-83P (I.D. :8.3mm X Overall length: 20mm) for 4 AWG
- GS-90P (I.D. 9.0mm X Overall length: 20mm) for 2 AWG

High Performance F187, F 250 and FT-210 Series Disconnect Terminals

Gold Plated
(10pcs/set)

FT-210(G)



World's First Fully Insulated Pure Copper Female Disconnect Terminal

- The Furutech FT-210 Fully Insulated Female Disconnect Terminal using 24k Gold-plated α (Alpha) pure copper conductor.
- Insulation Tube: RoHS Compliant PVC (Yellow)
- Suitable TAB Size: 0.250 X 0.032 " / 6.35 X 0.8 mm.
- Suitable Wire Size: FT-210—5.5 sq. mm max. (12~10 AWG)


F114 2.0 sq. mm max. (16~14 AWG)

F118 1.25 sq. mm max. (22~18 AWG)

F210 5.5 sq. mm max. (12~10 AWG)

F214 2.0 sq. mm max. (16~14 AWG)

F218 1.25 sq. mm max. (22~18 AWG)



- The Furutech F187 & F250 Insulated Push-on Disconnect Terminal features α (Alpha) phosphor bronze non-magnetic 24k Gold-plated conductor.
- TAB Size: F 250 series: 0.250 X 0.032 " / 6.35 X 0.8 mm.
F 187 series: 0.187 X 0.032 " / 4.75 X 0.8 mm.
- Insulation Tube: RoHS Compliant PVC (Yellow / Blue / Red).
- Rhodium-Plated version by request.

Furutech High End Performance Speaker Binding Posts

Low-Mass, One-Piece Wire-Wound α (Alpha)-OCC Speaker Binding Posts

Introducing Furutech's revolutionary, Patented FT-860 Series One-Piece Wire-Wound Binding Posts are ideal for speaker builders, manufacturers and do-it-yourselfers looking for low-mass, quality engineered and superb-sounding terminals.

(US Patent No.: 13,404,708)

- Patented One piece wound-wire construction
- Main conductor: Rhodium α (Alpha)-OCC wound-wire conductor
- Low mass POM plastic injected terminal pole
- Nylon (red/white) and Polycarbonate insulation
- Connections: Disconnect connector termination
- Specified for core diameters up to 4.5mm



Rhodium-Plated
FT-865(R)

Housing: Eutectic copper alloy



Rhodium-Plated
FT-866(R)

Housing: Carbon fiber and nonmagnetic stainless



Rhodium-Plated
FT-867(R)

Housing: Nylon and fiberglass



FT-809(R) Rhodium-Plated
FT-809(G) 24k Gold-Plated



- Patented Torque Guard construction
- Main conductor: Rhodium or 24k Gold-Plated α (Alpha) Pure Copper conductor
- Housing: Nylon/fiberglass with piezo ceramic and carbon damping material
- Nylon (red/white) and Polycarbonate (clear) insulation
- Connections: Solder or Crimp termination
- Specified for core diameters up to 4.5mm
- Dimensions: Housing unit: \varnothing 25.0 x 30. mm (L) x 38.9mm overall height
Insulation: Polycarbonate (Clear) 19.3 \varnothing x 7.3mm(H)
Total overall length: 74.6 mm approx.



FT-818(R) Rhodium-Plated (2 Pcs/Set)



- Patented Torque Guard construction
- Main conductor: Rhodium α (Alpha) Pure Copper conductor
- Housing: Carbon fiber, nonmagnetic stainless, eutectic copper alloy
- Polycarbonate (red/black) and Polycarbonate (clear) insulation
- Connections: Soldered or set-screw
- Specified for core diameters up to 4.5mm
- Dimensions: Housing: 25.0 \varnothing x 30.2mm (L) x 37.4mm overall height
Insulation: Polycarbonate (Clear) 19.3 \varnothing x 7.3mm (H),
Total overall length: 74.6mm approx



FT-816(R) Rhodium-Plated (2 Pcs/Set)

- Main conductor: Rhodium α (Alpha) Pure Copper conductor
- Housing: Carbon fiber, nonmagnetic stainless, eutectic copper alloy
- Connections: Soldered or set-screw
- Specified for core diameters up to 4.5mm
- Dimensions: Housing: 18.8 \varnothing x 22.5mm (H) x 37.4mm overall height
Insulation: Polycarbonate (Clear) 19.3 \varnothing x 7.2mm(H),
Total overall length: 59.6mm approx.



FT-807(R) Rhodium-Plated
FT-807(G) 24k Gold-Plated

- Main conductor: Rhodium or 24k Gold-Plated α (Alpha) Pure Copper conductor
- Housing: Carbon fiber, nonmagnetic stainless, eutectic copper alloy
- Connections: Soldered or set-screw
- Specified for core diameters up to 4.5mm
- Dimensions: Housing: 20.4 X 18.0 \varnothing x 28.0mm (H) overall height
Insulation: Polycarbonate (Transparent black) 20.0 \varnothing \pm 0.2mm x 15.6mm(H),
Total overall length: 62.76 mm approx.

High Performance Speaker Binding Posts

FP-803(R) Rhodium Plated (2 Pcs/ Set)

FP-803(G) 24k Gold-Plated (2 Pcs/ Set)



- Main conductor: 24k gold-plated α (Alpha) Phosphor bronze conductor
- Housing: Matte black finished eutectic copper alloy
- Nylon (red/ black) and Polycarbonate (clear) insulation
- Connections: Soldered or set-screw
- Specified for core diameters up to 4.5mm
- Dimensions: Housing: 15.5 \varnothing x 21.3mm (H) overall height
Insulation: Polycarbonate (Clear) 19.1 \varnothing \pm 0.2mm x 7.2mm(H),
Total overall length: 54.5 mm approx.


New High End Performance RCA sockets

The FT-909 & FT-903 series RCA sockets feature an α (Alpha) pure copper conductor for minimal impedance set in a super heat resistant Liquid Crystal Polymer Resin housing. The superior compound damping material (LCP) is also incorporated into the chassis nut to ensure there is no resonance. The construction of the FT-909 & FT-903 is patent pending and their design is unique to Furutech!



FT-903(R) Rhodium-Plated **FT-903(G)** 24k Gold-Plated
FT-909(R) Rhodium-Plated **FT-909(G)** 24k Gold-Plated

- Main conductor: 24k gold-plated α (Alpha) Pure copper conductor
- Insulation Body: Liquid Crystal Polymer Resin.
- Color ring: Nylon resin (red/white)
- Chassis fixed nut: Plated Lead Free Copper alloy
- Connections: Soldered • FT-909 Specified for PCB
- FT-909 Dimensions: 20.2 x 16.0 x 36.5 mm (L) overall length approx.
- FT-903 Dimensions: 16.0 \varnothing x 40.0 mm (L) overall length approx.
- Rhodium plated version by request



FP-908(R)


Rhodium-Plated

- rhodium-plated or gold-plated α (Alpha) Pure Copper center conductor
- α (Alpha) copper alloy rhodium or Gold-Plated body
- Central Insulation & Outer Insulation Ring : Nylon + Fiberglass (Red, White)
- Conductor fixed by soldering. Specified for PCB
- α (Alpha) copper alloy rhodium or Gold-Plated fixing ring nut
- Dimensions: 17.0mm diameter X 21.1mm(H) X 34.5mm overall length



FP-900(G) 24k Gold-Plated

- Central and Earth conductor- α (Alpha) Copper Alloy Conductor
- Non-magnetic direct 24k Gold-Plated Conductor
- Copper Alloy Housing and Nut cap (24k Gold-Plated)
- Nylon (red, white) Mounting Insulation set and PETF Fluoropolymer (white) Inner insulation.
- Connections: Soldered



FP-901(R)

Rhodium-Plated (2 Pcs/Set)

- Central and Earth conductor- α (Alpha) Copper Alloy Conductor
- Non-magnetic direct 24k Gold-Plated Conductor
- Copper Alloy Housing and Nut cap (24k Gold-Plated)
- Nylon (red, white) Mounting Insulation set and PETF Fluoropolymer (white) Inner insulation.
- Connections: Soldered

High End Performance SCHUKO Wall Sockets



24k Gold-Plated Non-magnetic conductors with frosted finish front plate
FT-SWS(G)

24k Gold-Plated Non-magnetic conductors with ABS front plate
FP-SWS(G)

Another world-class high-performance product from Furutech is our European Schuko-type wall socket. It's manufactured to extremely high standards and is unlike anything else found in the European market. It's sure to be a hit with those looking for the best there is.

Rhodium-Plated Non-magnetic conductors with a Carbon fiber finished face plate.
FT-SWS(R)

Rhodium-Plated Non-magnetic conductors with a Carbon fiber finished face plate
FT-SWS NCF(R)



- α (Alpha) Pure copper Conductor (t : 0.5mm)
- Material: Nylon/fiberglass body and Poly carbonate cover; Bracket with a 1.0mm thick Zinc/steel brace plate with Zn-Al Alloy Cast Front Plate.
- Specified for wire diameters of 2.5mm (set screw)
- Dimensions: 95.0mm (L) x 95.0mm (W) x 45.9mm(H)
- Rating: 16A 250V A.C.



High Performance Duplex SCHUKO Wall Sockets



Rhodium-Plated Non-magnetic conductors with a Carbon fiber finished face plate.

FT-SWS-D(R)

24k Gold-Plated Non-magnetic conductors with ABS front plate

FP-SWS-D(G)

- α (Alpha) Pure copper main Conductor (t : 0.5mm)
- Material: Nylon/fiberglass body and Poly carbonate cover; Bracket with a 1.0mm thick Zinc/steel brace plate, ABS Front Plate.
- Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw)
- Dimensions: 152.0mm (L) x 81.0mm (W) x 48.0mm(H)
- Rating: 16A 250V A.C.

High Performance BSI 1363 Single and Duplex Wall Sockets



FP-1363-S(R) **FP-1363-D(R)**

FP-1363-S(G) **FP-1363-D(G)**

The world's only true audio grade BSI 1363 Wall socket

- α (Alpha) Pure copper main Conductor (t : 1.2 mm)
- Cover material: ABS front plate and Polycarbonate cover
- Chassis material: Nylon/fiberglass body with 1.0mm thick copper alloy chassis plate
- Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw)
- Dimensions:
FP-1363-S---86.0mm (L) x 86.0mm (W) x 23.0mm(H)
FP-1363-D---152.0mm (L) x 86.0mm (W) x 23.0mm(H)
- Rating: 13A 250V A.C.

High End Performance SCHUKO Distributor Sockets

Rhodium-Plated Non-magnetic conductors

FT-SDS NCF(R)

Rhodium-Plated Non-magnetic conductors

FT-SDS(R)

24k Gold-Plated Non-magnetic conductors

FT-SDS(G)

- α (Alpha) Pure copper Conductor (t : 0.5mm)
- Material: Nylon/fiberglass body and Poly carbonate cover; Base Bracket with a 1.0mm thick Zinc/steel brace plate
- Specified for wire diameters of 2.5mm (set screw)
- Dimensions: 54.7mm (L) x 54.7mm (W) x 52.5mm(H)
- Rating: 16A 250V A.C.



High Performance SCHUKO Sockets

Rhodium-Plated

FI-E30 NCF(R)

Rhodium-Plated

FI-E30(R)

24k Gold-Plated

FI-E30(G)

- α (Alpha) Copper Alloy Conductor
- Type: 2-Pole + Earth • Rating: 16A/250V
- Specifications: Accommodates wire diameters to 2.5mm max. (12 AWG)
- Dimensions: 50.6 (L) x 50.6 (W) x 36mm (H)
- Approvals : KEMA



High End Performance SCHUKO Connectors

The finest schuko connectors available, electrically and mechanically damped through "NCF" (FI-E50 NCF) and piezoelectric effect (FI-E50R) and Furutech's Floating Field damper function

- α (Alpha) pure-copper rhodium-plated conductors
- Piezo Ceramic series connectors incorporate ceramic nano-sized particles, carbon powder, nylon and fiberglass
- Floating Field Damper function (US Patent No.: 6,669,491)
- Specified for cable diameters from 6mm to 20mm
- Dimensions: Body length 56.6mm x 40.5mm diameter x 93mm overall length
- Patent pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion plus patent-pending specially engineered pressure plate

SCHUKO Power Connector
FI-E50(R)



Top-Tier SCHUKO Power Connector
FI-E50NCF



Furutech's rhodium-plated FI-E38 Schuko connector features the Floating Field Damper function and a new and improved cable clamp design.

Rhodium-Plated 24k Gold-Plated
FI-E38(R) **FI-E38(G)**


- α (Alpha) Pure copper Conductors machined from solid pieces of the finest pure copper.
- Floating Field Damper function (US Patent No.: 6,669,491/European Patent (EP1445837))
- Specifications: Accommodates cable diameters from 6mm to 17.0mm
- Dimensions: Body length 56.6mm x 39.6mm diameter x 88.7mm overall length
- Rated: 16A/250V

Rhodium-Plated
FI-E48(R)



- Rhodium-plated α (Alpha) Pure copper conductor
- Floating Field Damper System* (US Patent No.: 6,669,491/European Patent (EP1445837))
- Piezo connector bodies incorporating ceramic nano-sized particles and carbon powder.
- Specified for cable diameters of 6.0mm to 20.0mm (Wire size of 5.5 square mm (10AWG) max.)

High End Performance UK Mains Connectors



Rhodium-Plated
FI-UK NCF(R)

Rhodium-Plated

FI-UK(R)

24k Gold-Plated

FI-UK(G)

24k Gold-Plated
FI-UK-N1(G) Right-angle version

Non plated
FI-UK-N1(Cu) Right-angle version

- α (Alpha) Copper Alloy Conductor
- Material: Fire proof ABS body/housing
- Specifications: Accommodates cable diameters of 4.0mm to 20.0mm (Right-angle version: 4.0mm to 19.0mm)
- Wire accommodation: Max. 5.5 square mm Max. AWG 10
- Dimensions: Body 50.4mm (W) x 50.2mm (L) x 55.8mm (H) / 50.2mm dia. x 89.5mm overall length (Straight version)
Body 50.4mm (W) x 50.2mm (L) x 55.8mm (H) / 79.5mm (H) x 64.0mm overall length (Right-angle version)
- Rated: 13A Fused/250V

High End Performance AUS/NZ Mains Connectors
(Australia Safety Approved Mains Connector)

Rhodium-Plated
FI-AU-N1(R)

24k Gold-Plated
FI-AU-N1(G)



- Approvals : NSW 26696 (Australia)
- α (Alpha) Pure copper Conductor
- Features improved plating and new metal cable clamp for resonance damping and firm grip
- Earth (Ground) Jumper System. (US Patent No.: 6,669,491 / European Patent (EP1445837))
- Material: Nylon/fiberglass front body • Polycarbonate shell
- Specifications: Accommodates cable diameters of 6.6mm to 20.0mm
- Wire accommodation: Max. 5.5 square mm Max. AWG 10
- Dimensions: Body length 40.2mm x 44.5mm diameter x 80mm overall length
- Rated: 10A/250V

High Performance SCHUKO Connectors

FI-E1 2L(R) Rhodium Plated Angled Schuko Connector

- Rhodium-plated α (Alpha) pure-copper conductors
- Floating Field Damper System (US Patent No.: 6,669,491)
- Nylon/fiberglass body incorporating carbon particles that absorb vibration and resonance
- Specified for cable diameters from 6.6mm to 18.0mm
- Dimensions- 84.0mm Overall Length X 42.2mm X 55.0mm Approx.
- Metal cable clamp improves grip and reduces mechanically and electrically induced distortion
- 4 angle settings • Rating: FI-E12L(R)---16A 250V



FI-E1 1-N1(R) Rhodium-Plated
FI-E1 1(G) 24k Gold-Plated

- α (Alpha) Phosphor Bronze Conductor
- Features improved plating and new metal cable clamp for resonance damping and firm grip
- Materials: Front body Nylon/fiberglass • Shell polycarbonate
- Specifications: Accommodates cable diameters from 6.6mm to 16.0mm (With a longer screw up to 20mm)
- Dimensions: Body length 56.2mm x 39.3mm diameter x 89.3mm overall length
- Wire accommodation: Max. 5.5 square mm Max. AWG 10
- Rated: 16A/250V
- Approvals : KEMA




FI-E1 1(Cu) Non Plated

- α (Alpha) Phosphor Bronze Conductor for FI-E11(G)
- Specifications: Accommodates cable diameters from 6.6mm to 16.0mm (With a longer screw up to 20mm)
- Dimensions: Body length 56.2mm x 39.3mm diameter x 89.3mm overall length
- Wire accommodation: Max. 5.5 square mm Max. AWG 10
- Rated: 16A/250V
- Approvals : KEMA



AWARDS

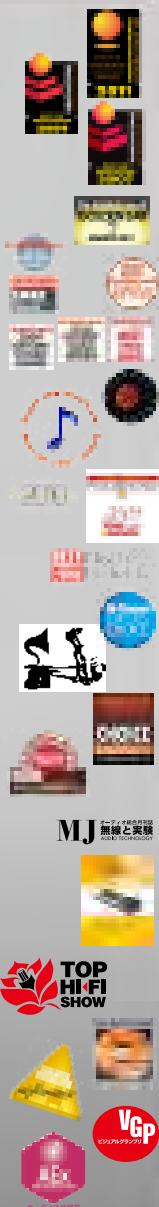

- Innovations Honoree CES 2011
- Best of Innovations CES 2009
- Best of Innovations CES 2007
- "Golden Ear Award" The Absolute Sound 2011
- "Product of the Year Award" The Absolute Sound 2007
- "Editors' Choice Award" The Absolute Sound 2007, 2008, 2009, 2010, 2011
- "Blue Moon Award" 6moons.com 2007
- "Best of 2007 Award" Enjoythemusic.com
- "Product of the Year" Tone Audio 2009, 2010
- "Best Product" High Fidelity 2010
- "Editor's Choice" HiFi News 2011
- Positive Feedback Online 2006 Brutus Award Winner
- Reviewers Choice Award Soundstage.com 2008
- Product of the Year Award High Fidelity Poland
- MJ Audio Technology Award Japan
- TOP TEST AWARD Sound & Vision Hungary
- Top Show Award HDI Show Moscow
- ExValue Award Tone Audio 2008
- HAUTE FIDELITE France 2005 & 2009
- VISUAL GRAND-PRIX (Japanese Magazine: AV REVIEW)
- AUDIO EXCELLENCE AWARD (Japanese Magazine: Audio Accessory)

Furutech designs and builds each and every product using our Pure Transmission Philosophy

- Hyper-pure non-magnetic materials
- Hyper-precision manufacturing techniques
- Special plating techniques

Furutech uses the following conductors treated with the Furutech α Alpha 2-Stage Super Cryogenic and Demagnetizing Treatment.

PCOCC: α (Alpha)-OCC

μ -OFC: α (Alpha) μ -OFC

Pure Copper: α (Alpha) Pure copper

Phosphor Bronze: α (Alpha) Phosphor Bronze

Copper Alloy: α (Alpha) Copper Alloy

Silver: α (Alpha) Silver

Silver Copper OCC: α (Alpha) Silver Hybrid OCC

Nano-OFC: Nano-Ag-Au

Nano-OCC: Nano-Au-Ag OCC

PC Triple C: PC Triple C

All Furutech Power Series products are PSE approved

- UL/CNL approved products available
- FI-E38/FI-E11/FI-E30 series products are KEMA KURE approved
- PCOCC is a registered trademark of Furukawa Electric Co., Ltd.
- Teflon is a registered trademark of DuPont

In keeping with our Pure Transmission Philosophy and to improve on and manufacture more effective products, Furutech reserves the right to change product specifications and materials without prior notice.



NCF is only found in Furutech products and is a registered trademark of Furutech Co., Ltd, Tokyo Japan

FURUTECH Co., Ltd.

Furutech Bldg., 3-9-1 Togoshi, Shinagawa-Ku Tokyo, 142-0041, Japan

TEL : +81-3-6451-3941 FAX : +81-3-6451-3942

E-mail: service@furutech.com

URL: www.furutech.com



Furutech is pleased to announce that its products conform to the requirements of the RoHS Directive. (FDHE-OP-6-1)

Furutech reserves the right to change product specifications without prior notice.